

CS698T

Wireless Networks: Principles and Practice

Topic 10
IEEE 802.15.4

Bhaskaran Raman,
Department of CSE, IIT Kanpur

<http://www.cse.iitk.ac.in/users/braman/courses/wless-spring2007/>

Personal Area Networks (PAN)

- WLAN: IEEE 802.11
 - Ethernet matching speed
 - Range: $O(100\text{m})$
- WPAN:
 - Low cost
 - Low power (battery should last several months)
 - Short range $O(10\text{m})$
 - Small size

IEEE 802.15 Series



802.15.3 (UWB)

High data rate
Multimedia applications

802.15.1 (Bluetooth)


Medium rate
Cell-phones, PDA
QoS suited for voice

802.15.4 (LR-WPAN)

Low rate
Industrial, residential,
medical applications
Low power
Low cost

ZigBee works hand-
in-hand with
802.15.4

802.15.4/ZigBee Architecture

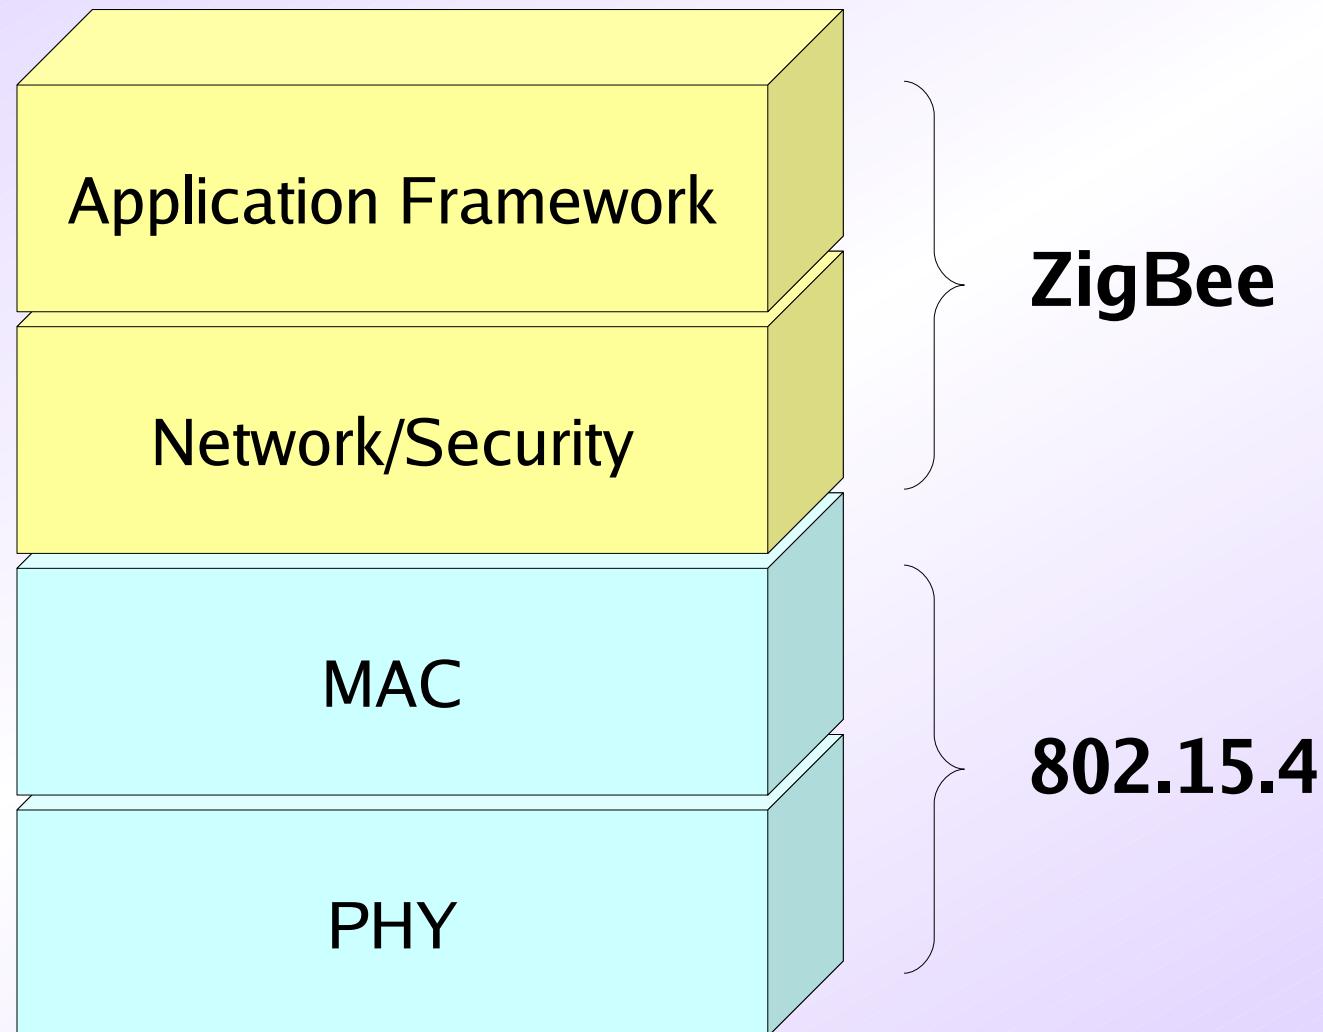

802.15.4 PHY

Table 1—Frequency bands and data rates

| PHY (MHz) | Frequency band (MHz) | Spreading parameters | | Data parameters | | |
|-----------|----------------------|----------------------|------------|-----------------|-------------------------|-------------------|
| | | Chip rate (kchip/s) | Modulation | Bit rate (kb/s) | Symbol rate (ksymbol/s) | Symbols |
| 868/915 | 868–868.6 | 300 | BPSK | 20 | 20 | Binary |
| | 902–928 | 600 | BPSK | 40 | 40 | Binary |
| 2450 | 2400–2483.5 | 2000 | O-QPSK | 250 | 62.5 | 16-ary Orthogonal |

1 channel

10 channels

16 channels


Source: IEEE 802.15.4 specification

802.15.4 Device Classes



- **Full Function Device (FFD)**
 - Can act as PAN “coordinator”
 - Can talk to any other device
- **Reduced Function Device (RFD)**
 - Cannot be a “coordinator”
 - Can talk only to FFD
 - Very simple implementation

Network Topologies

Star network

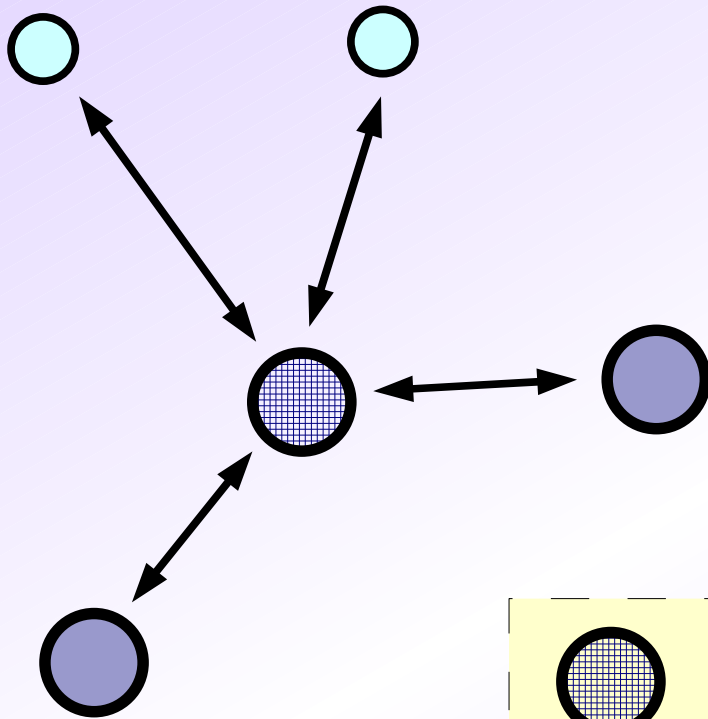

Peer-to-peer network

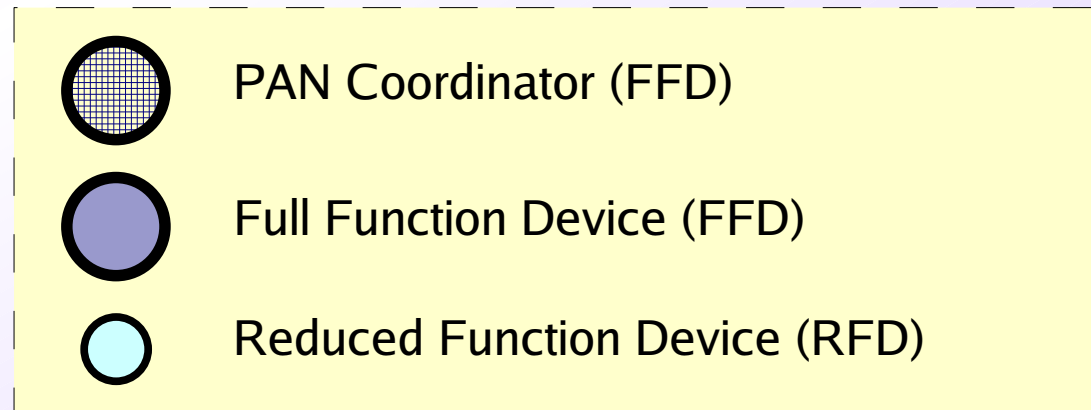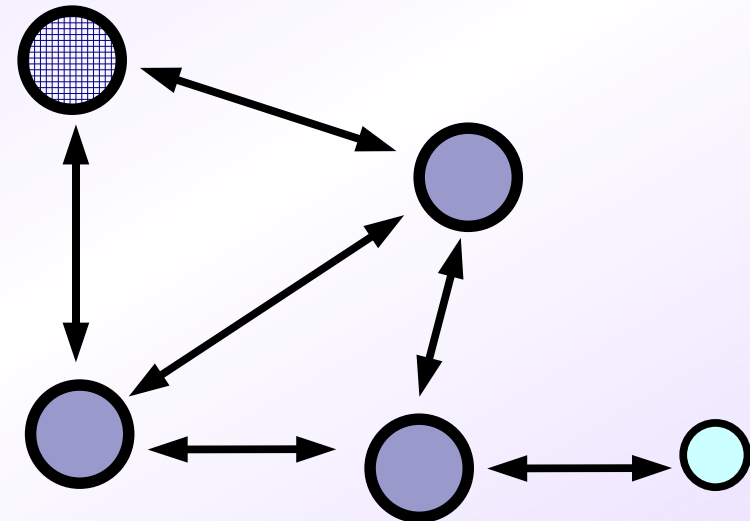



Topics in 802.15.4/ZigBee

- MAC protocol
- Data exchange mechanisms
- Starting and maintaining PANs
- Routing (ZigBee)

Optional Beacons


- A PAN can be beacon-enabled or non-beacon-enabled
 - Decided by the coordinator
 - Mechanism for power saving (if required)
- Beacon enabled ==> periodic beacons

Superframe Structure

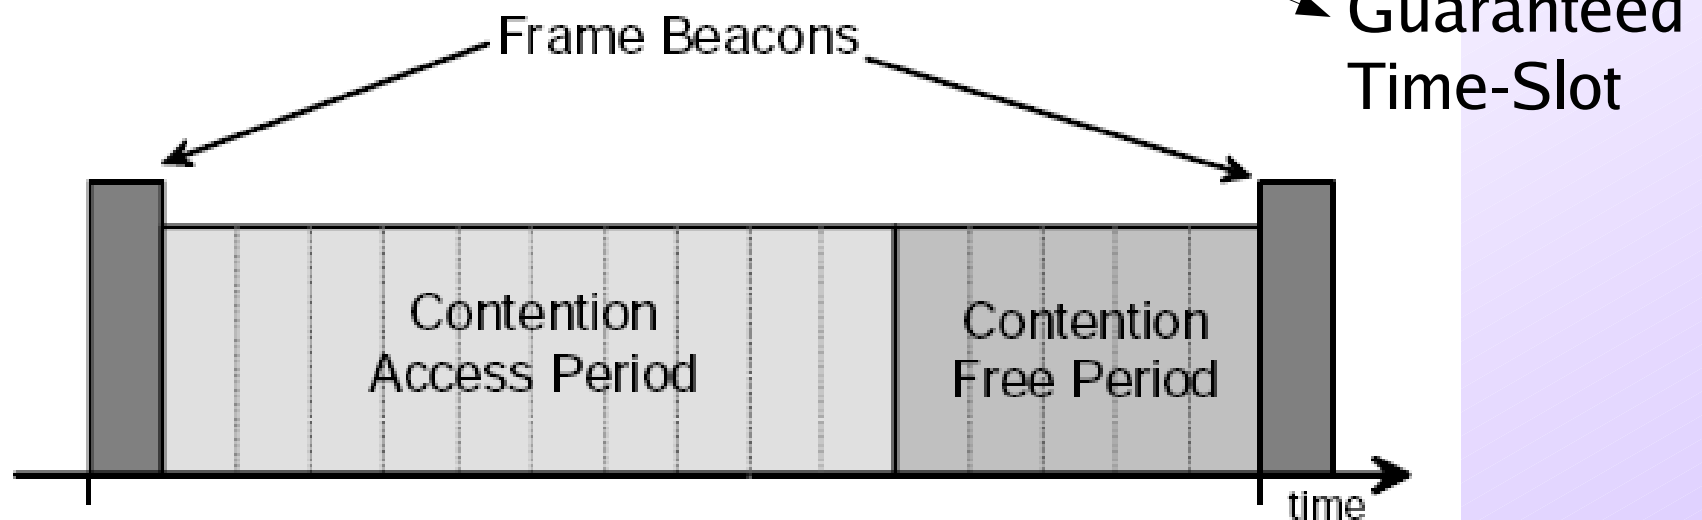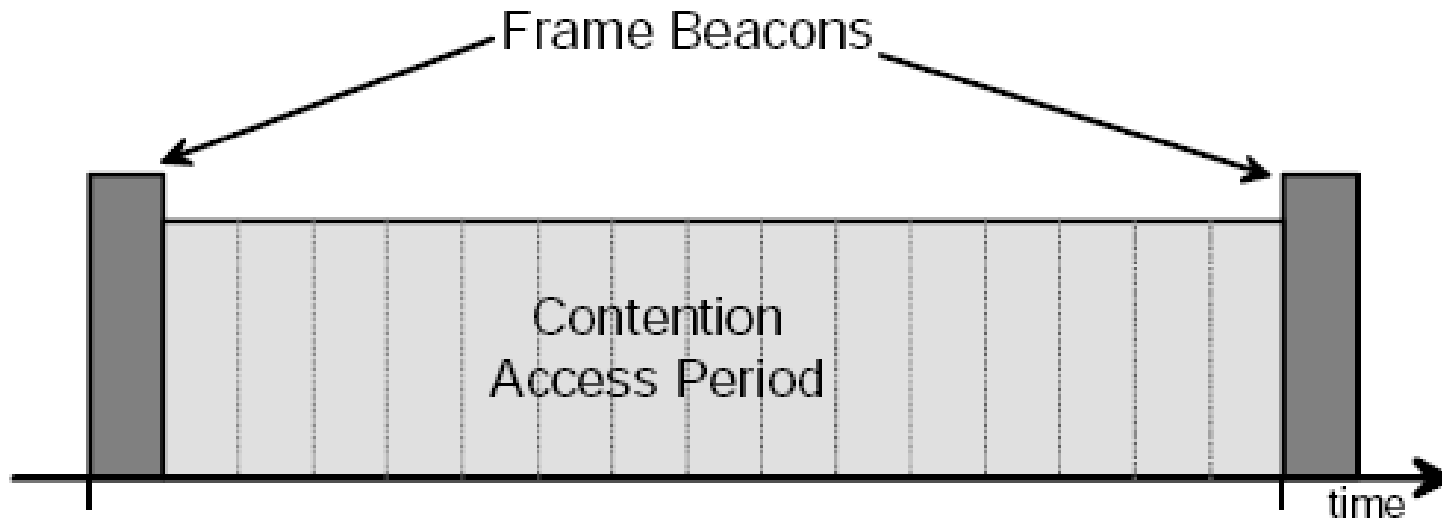

Source: IEEE 802.15.4 specification

Superframe Structure (Continued)

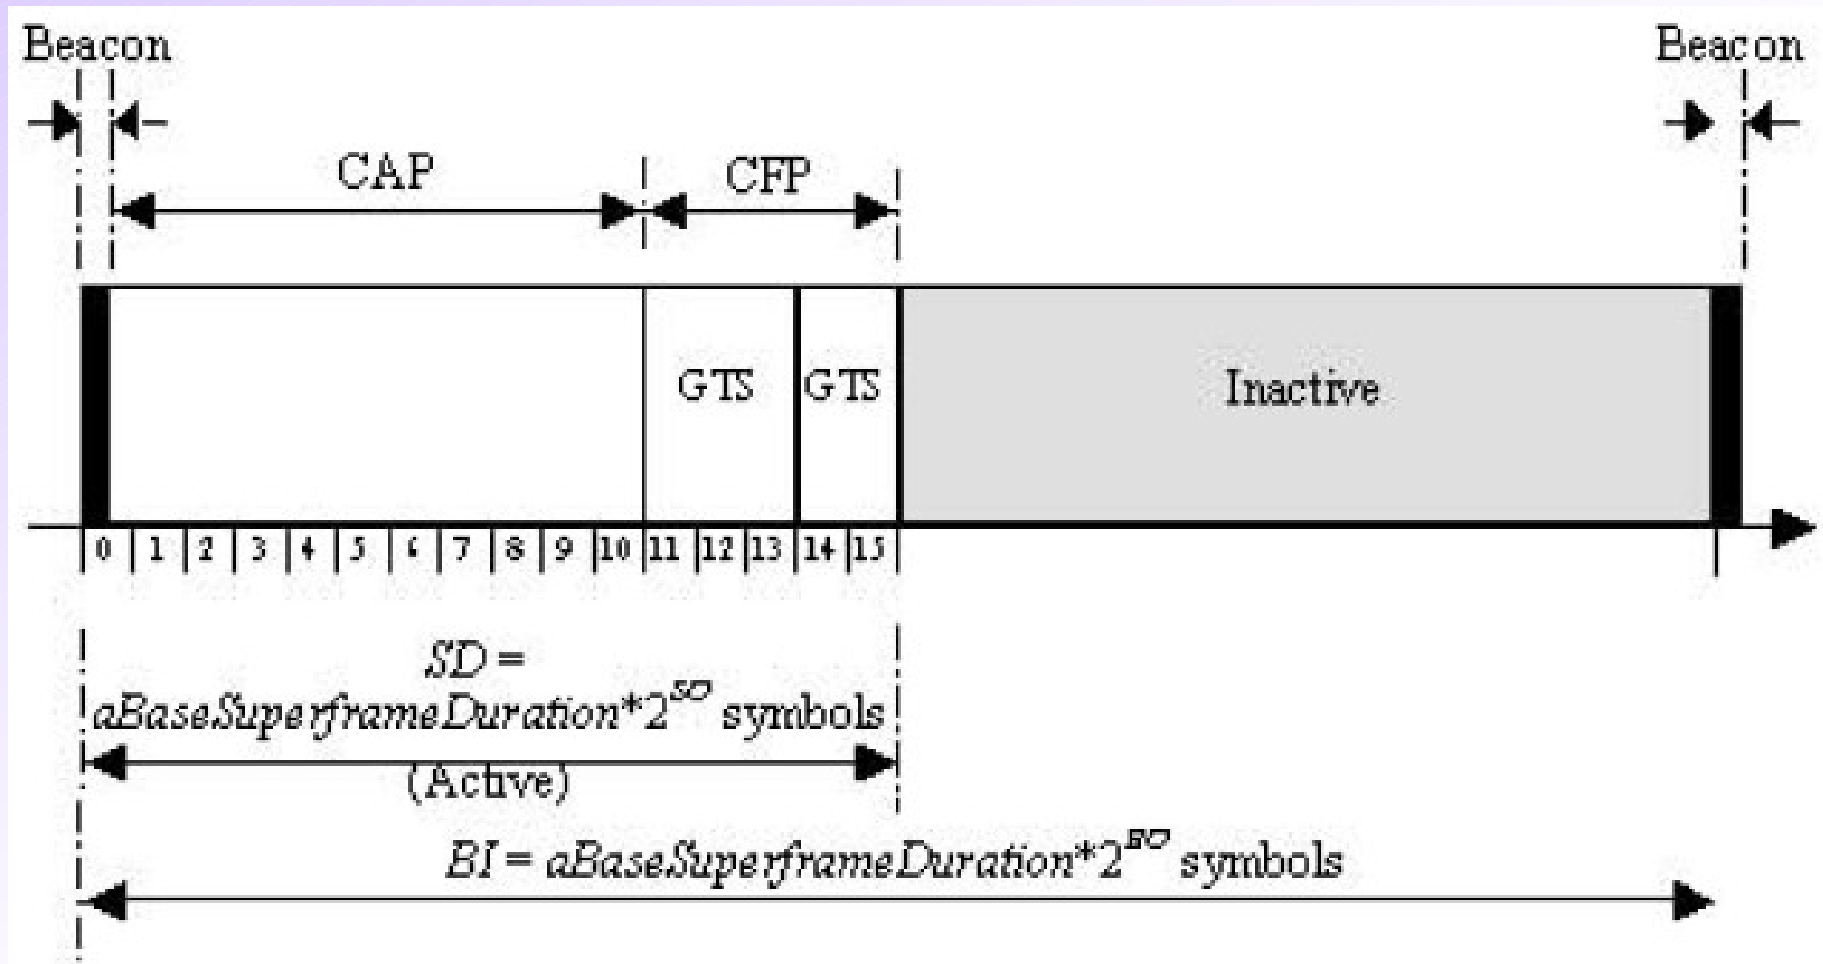

Beacon Interval (BI) can be a multiple of the Superframe Duration (SD)

Figure 59—An example of the superframe structure

Source: IEEE 802.15.4 specification

Superframe Structure: Remarks

- CAP, then CFP
- Superframe has **16 slots**
- Maximum of 7 slots for GTS
- A GTS may occupy more than one slot
- All GTS tx must end before start of beacon tx
- All tx in CAP must end before CFP (or beacon)
- **ACKs** are optional
 - Requirement specified in a data packet


CSMA Algorithm

- Called **slotted CSMA** in beaconed PANs
- **Unslotted CSMA** in non-beaconed PANs
- But both use “units” of time (“slots” in 802.11 terminology)
 - **aUnitBackoffPeriod**: 20 symbols by default
- In beaconed PANs, the first backoff is aligned with the start of the super frame

CSMA: Variables Used

- **BE (Backoff Exponent)**: backoff delay is for $\text{random}[0, 2^{\text{BE}})$ units of time
- **CW (Contention Window)**: the number of units to perform CCA (Clear Channel Assessment) after random backoff
 - **Warning**: do not confuse with 802.11 terminology
- **NB: Number of Backoffs** so far
 - Initialized to 0

Slotted CSMA

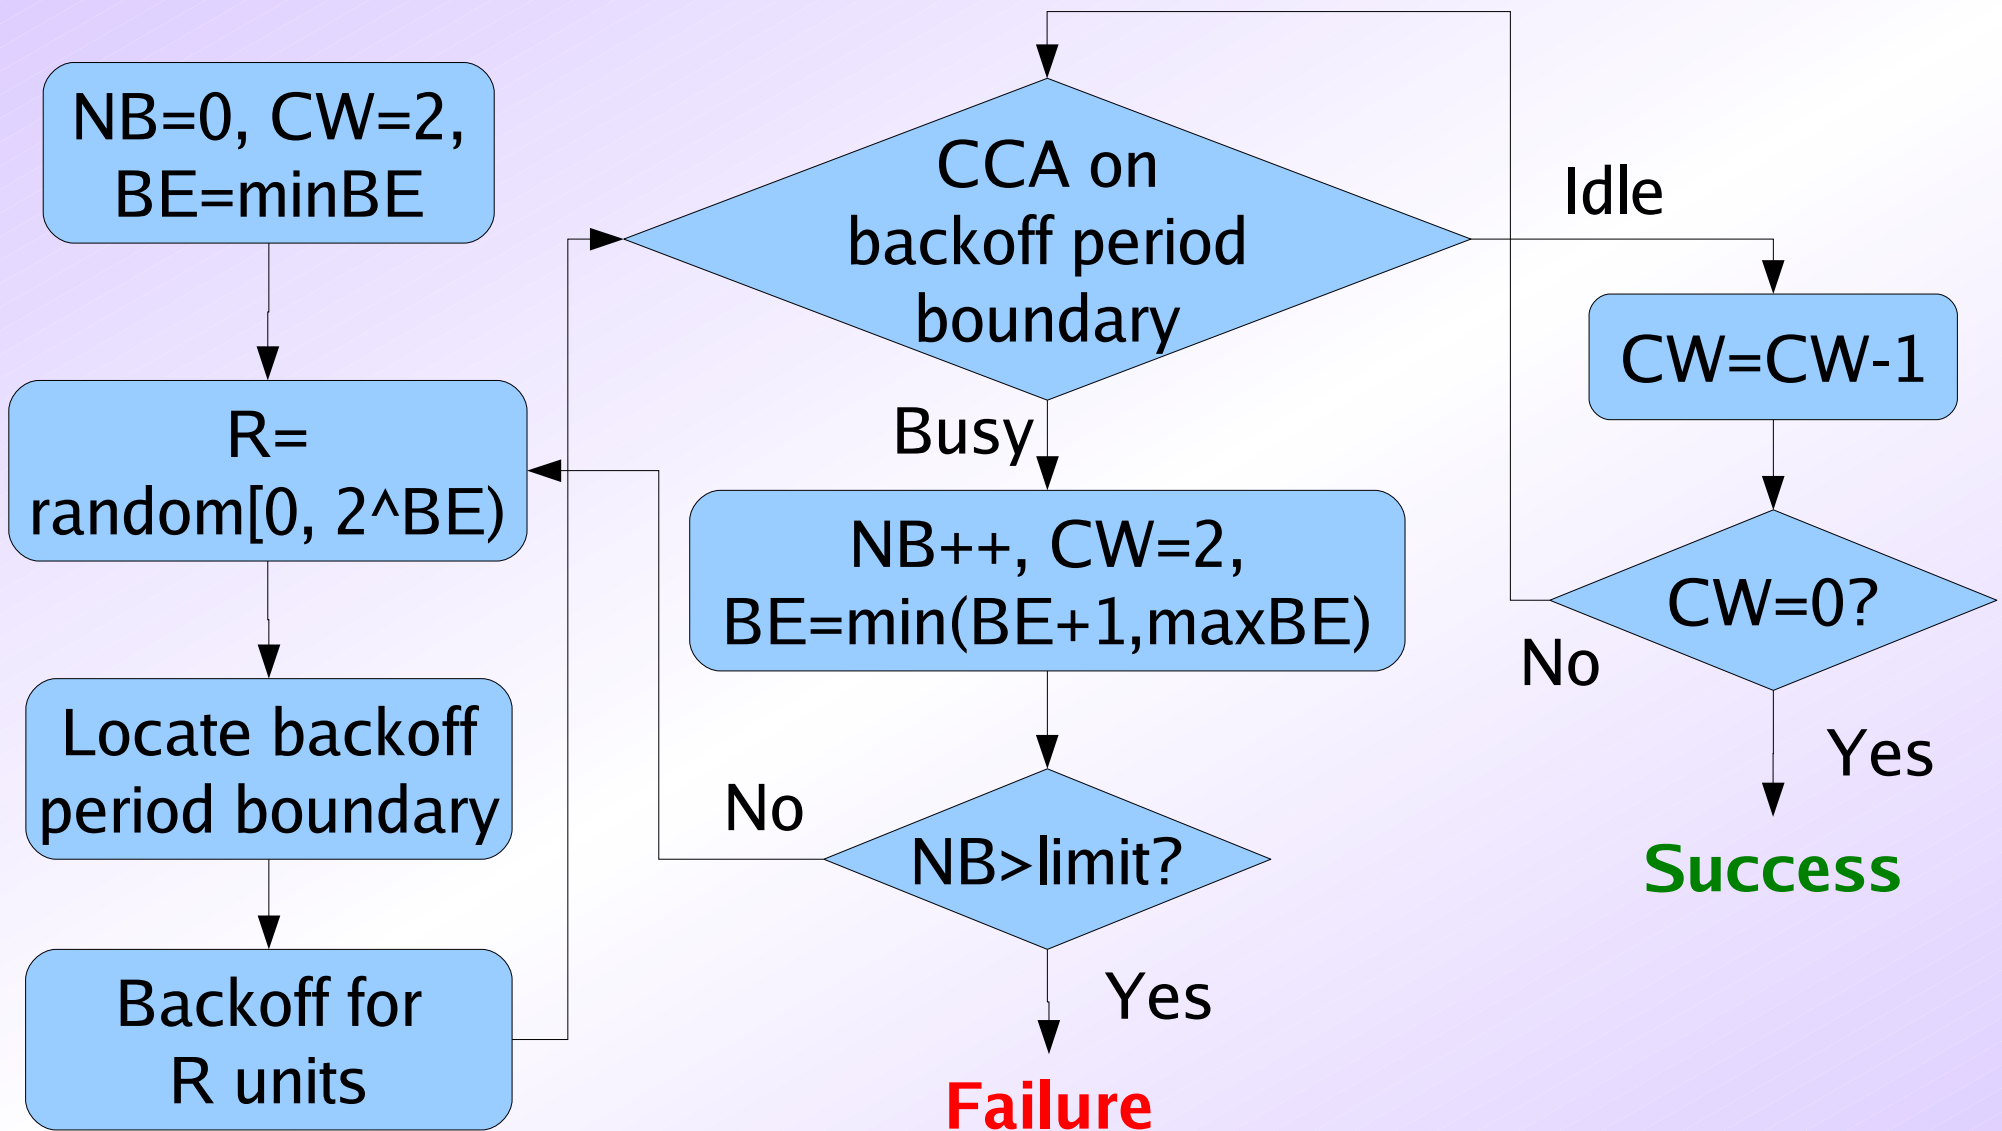


Default values: $\text{minBE}=3$, $\text{maxBE}=5$, $\text{limit}=4$

Differences from 802.11 CSMA

- Have to finish by a specific time
 - Otherwise continue random delay in next superframe
- 802.11 has per-delay-slot CCA
 - Why CCA for two units in 802.15.4?
- No limit on number of retries in 802.11
- During init: $BE = \min(2, \min BE)$ possible
 - If device is battery constrained
 - Allows device to save power by prioritizing its tx

Unslotted CSMA (Differences)

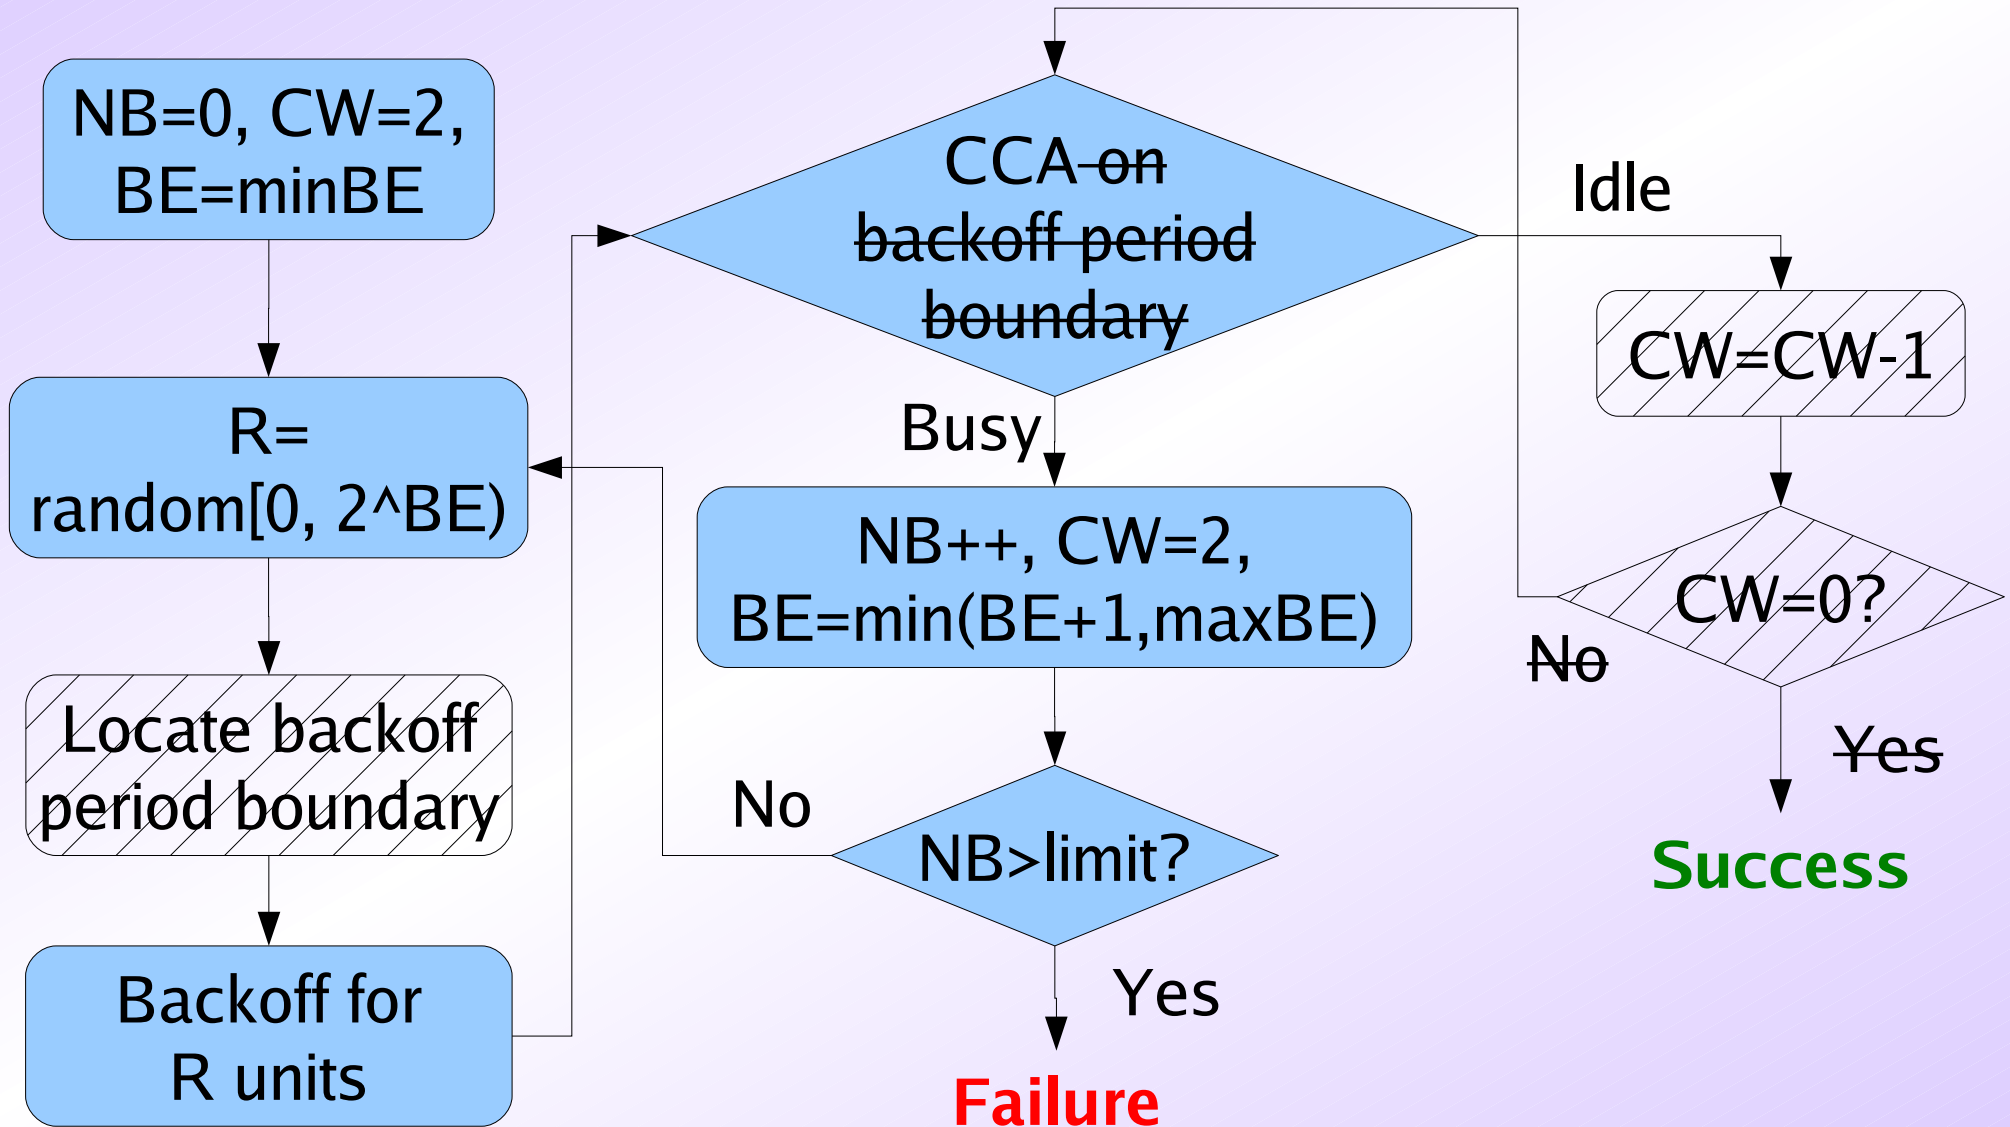


Scanning and PAN Creation

- Scanning procedures: active, passive
- **Active scan:**
 - Send beacon request
 - A beaoned PAN coordinator need not respond to the request (periodic beacon will suffice)
 - A non-beaoned PAN coordinator will respond with a beacon
- **Orphan scan:** orphan notification command sent by device to a coordinator
- A new PAN started only after an active scan
 - New PAN id is chosen (collision possible)

PAN id Collision

- Detection by coordinator:
 - On receiving a beacon frame with same PAN id
 - On receiving a PAN id **collision notification**
- Detection by device:
 - On receiving conflicting information
- Resolution:
 - Coordinator will perform **active scan**
 - Select **new PAN id**
 - Broadcast **coordinator realignment** message


Data Transmission to Coordinator (Beaconed PAN)

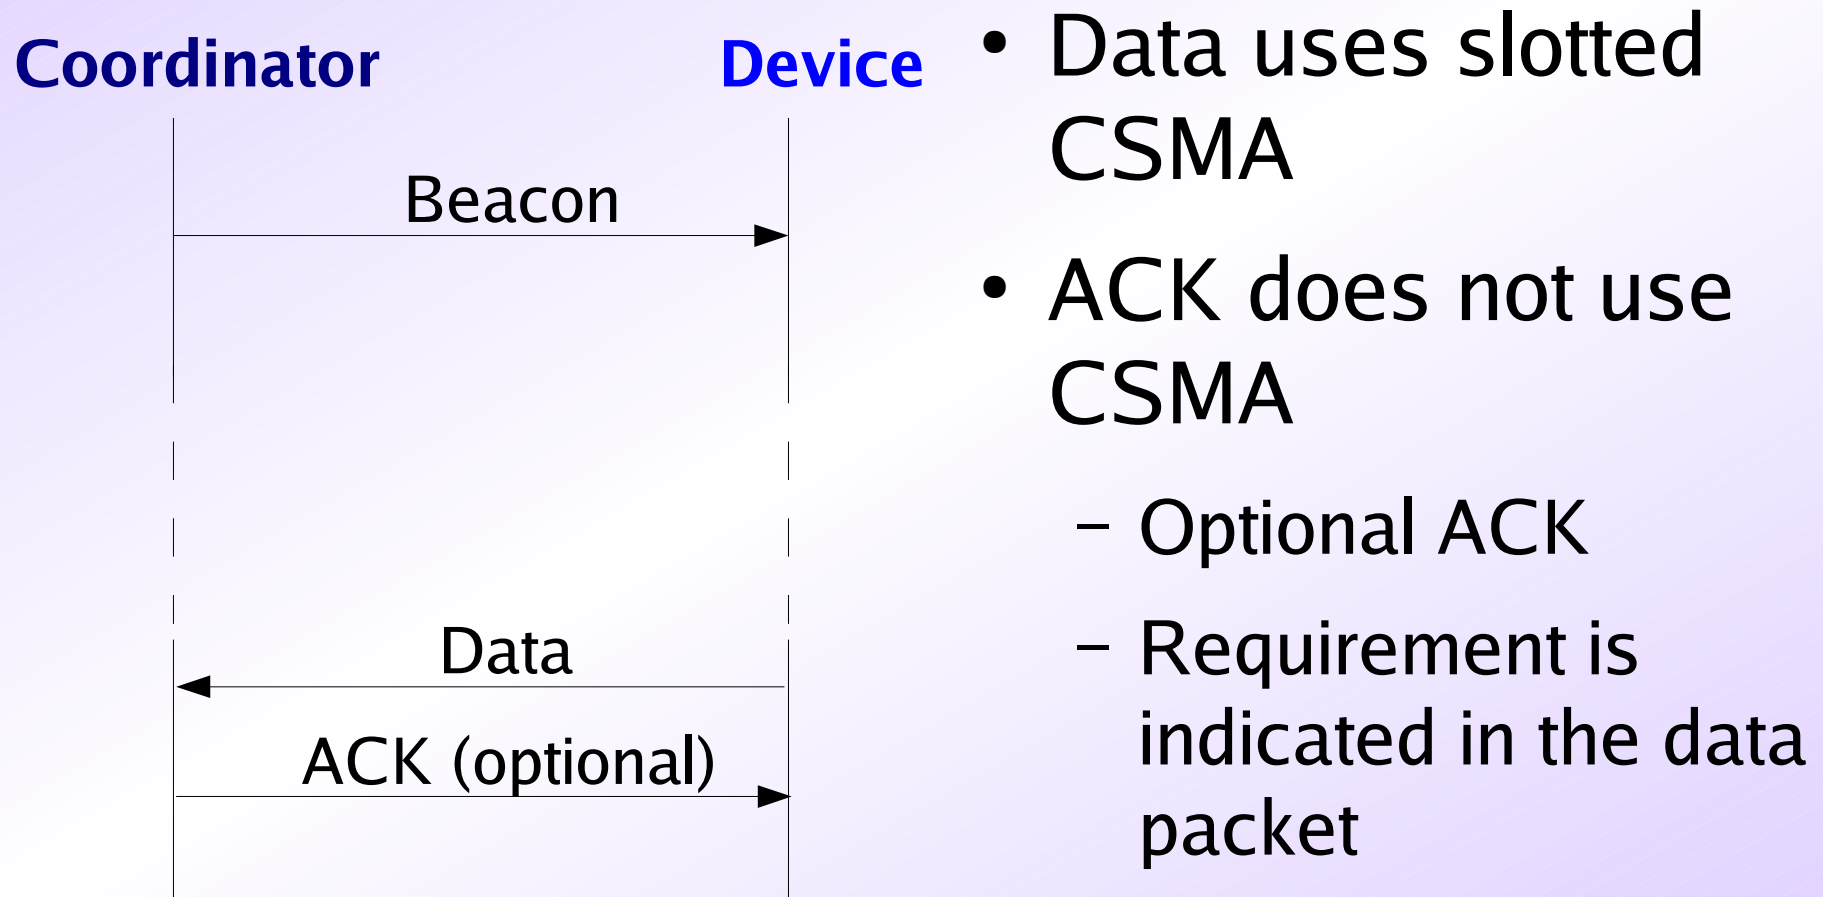

Data Transmission to Coordinator (non-Beaconed PAN)

Coordinator

Device

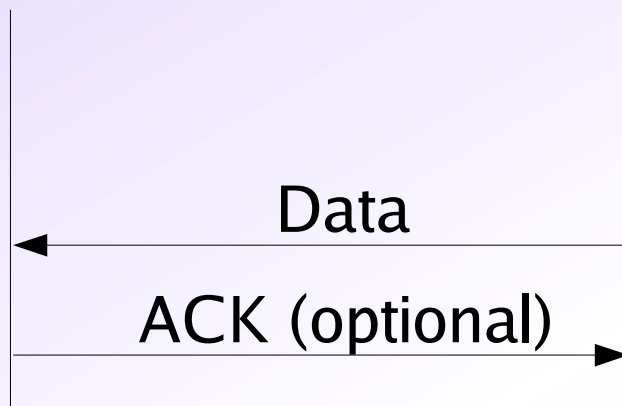


- Data uses unslotted CSMA
- ACK does not use CSMA
 - Optional ACK
 - Requirement is indicated in the data packet

Data Transmission from Coordinator (Beaconed PAN)

Coordinator

Device

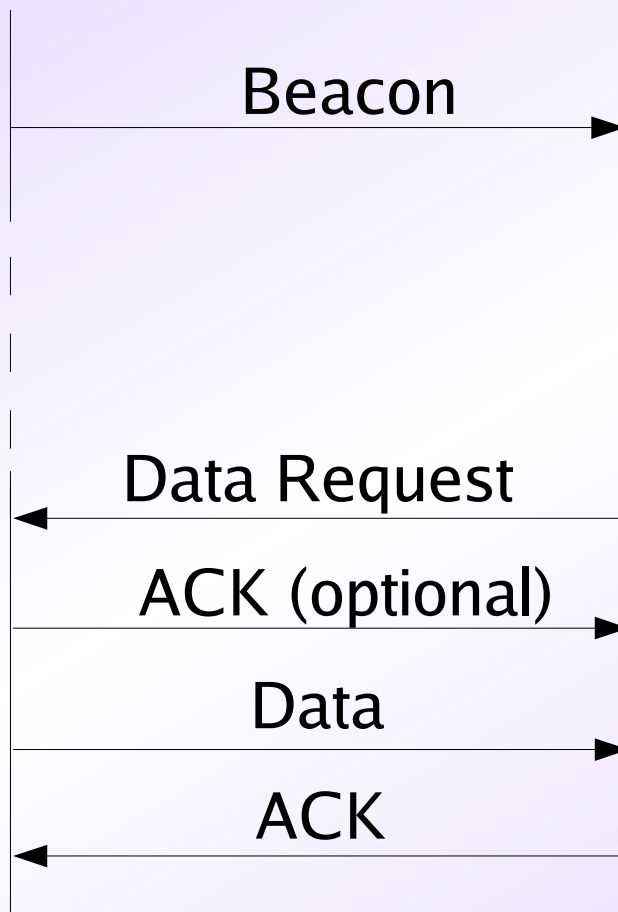


- Presence of downlink data is indicated in beacon
- Whenever device wakes up, it requests for data
- Data removed from coordinator queue on ACK

Data Transmission from Coordinator (non-Beaconed PAN)

Coordinator

Device

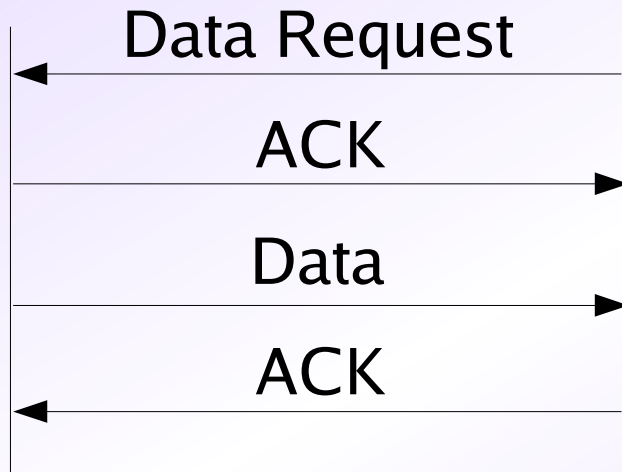

- No data pending at coordinator ==> send data of length zero

Peer-to-peer Data Transfers

- Unslotted CSMA or using synchronization
 - Synchronization specification beyond the scope of 802.15.4

Concept of Primitives

- A network layer provides a service which is used by a higher layer

