

Workshop on Essential Abstractions in GCC

GCC Control Flow and Plugins

GCC Resource Center
(www.cse.iitb.ac.in/grc)

Department of Computer Science and Engineering,
Indian Institute of Technology, Bombay



1 July 2011

Outline

- Motivation
- Plugins in GCC
- GCC Control Flow
- Link time optimization in GCC
- Conclusions



Part 1

Motivation

Module Binding Mechanisms

- The need for adding, removing, and maintaining modules relatively independently
- The mechanism for supporting this is called by many names:
 - ▶ Plugin, hook, callback, ...
 - ▶ Sometimes it remains unnamed (eg. compilers in gcc driver)
- It may involve
 - ▶ Minor changes in the main source
Requires static linking
 - ▶ No changes in the main source
Requires dynamic linking



Module Binding Mechanisms

- The need for adding, removing, and maintaining modules relatively independently
- The mechanism for supporting this is called by many names:
 - ▶ Plugin, hook, callback, ...
 - ▶ Sometimes it remains unnamed (eg. compilers in gcc driver)
- It may involve
 - ▶ Minor changes in the main source
Requires static linking
*We call this a **static plugin***
 - ▶ No changes in the main source
Requires dynamic linking
*We call this a **dynamic plugin***



Plugin as a Module Binding Mechanisms

- We view plugin at a more general level than the conventional view
Adjectives “static” and “dynamic” create a good contrast
- Most often a plugin in a C based software is a data structure containing function pointers and other related information




Static Vs. Dynamic Plugins


- Static plugin requires static linking
 - ▶ Changes required in `gcc/Makefile.in`, some header and source files
 - ▶ At least `cc1` may have to be rebuild
 - All files that include the changed headers will have to be recompiled
- Dynamic plugin uses dynamic linking
 - ▶ Supported on platforms that support `-ldl -rdynamic`
 - ▶ Loaded using `dlopen` and invoked at pre-determined locations in the compilation process
 - ▶ Command line option
 - `-fplugin=/path/to/name.so`
 - Arguments required can be supplied as name-value pairs




Static Plugins in the GCC Driver

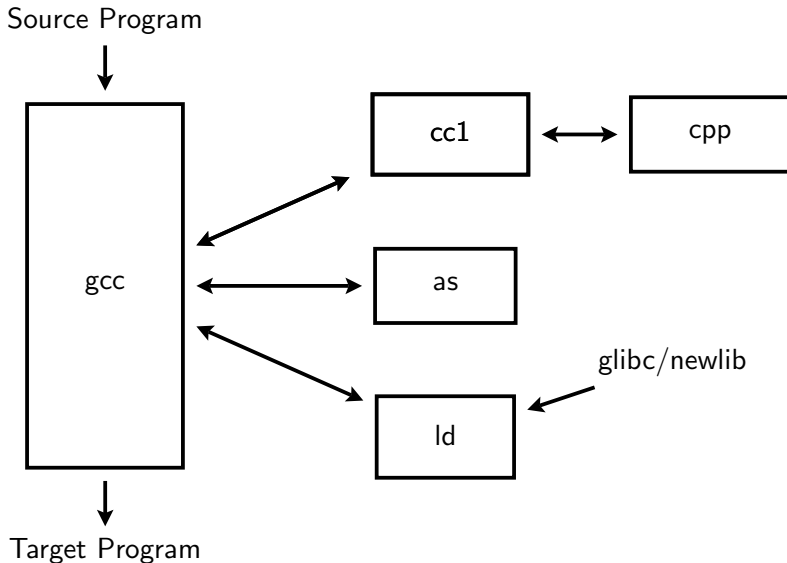


Static Plugins in the GCC Driver

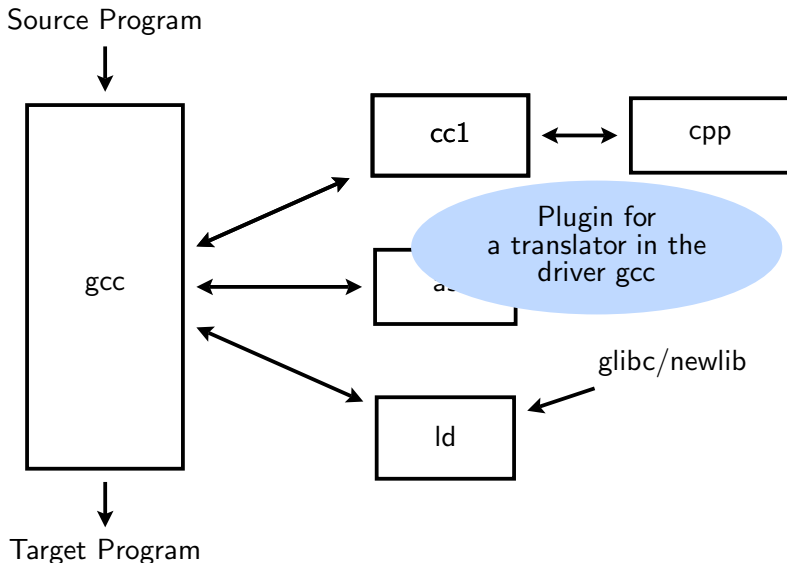


Static Plugins in the Generated Compiler

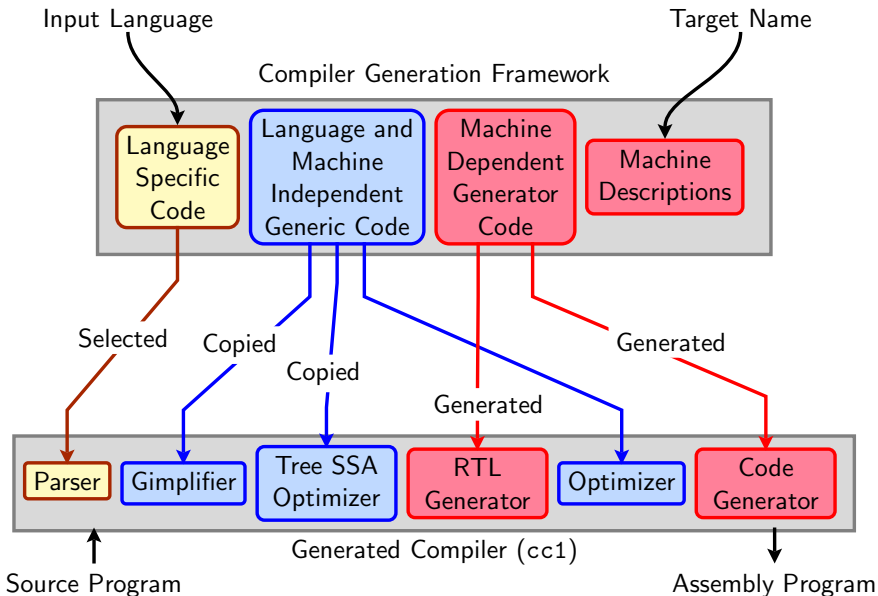


Static Plugins in the Generated Compiler

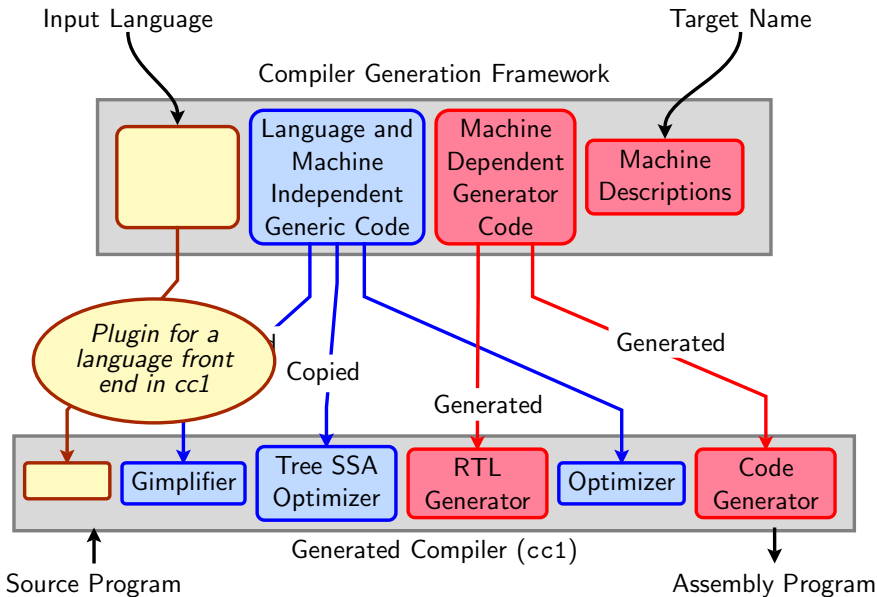

Static Plugins in the Generated Compiler

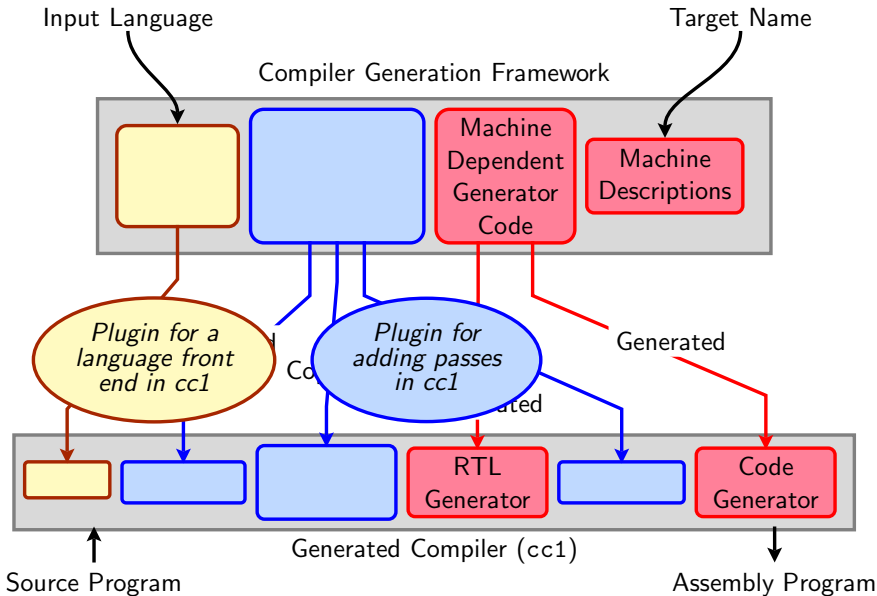

Static Plugins in the Generated Compiler

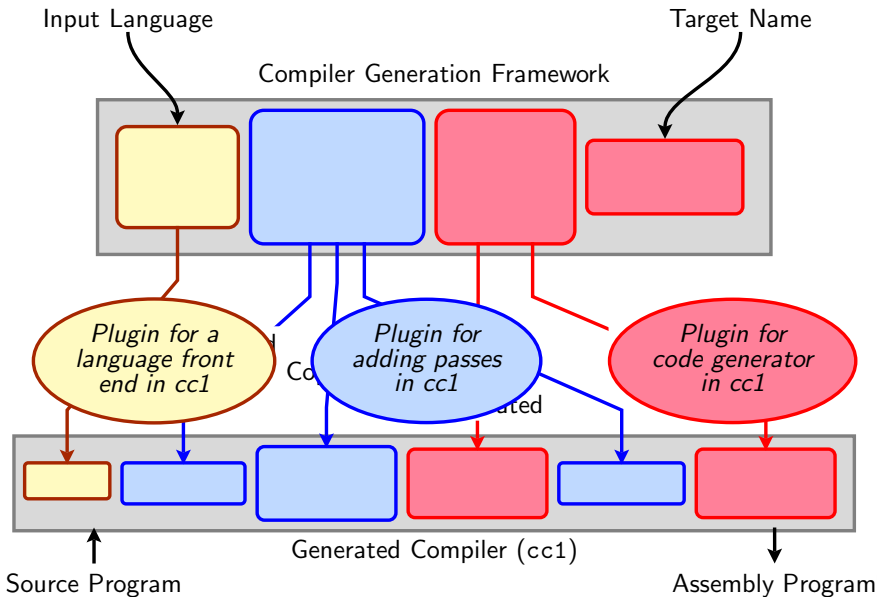

Part 2

Static Plugins in GCC

GCC's Solution

Plugin	Implementation	
	Data Structure	Initialization
Translator in gcc	Array of C structures	Development time
Front end in cc1	C structure	Build time
Passes in cc1	Linked list of C structures	Development time
Back end in cc1	Arrays of structures	Build time



Plugin Data Structure in the GCC Driver

```
struct compiler
{
  const char *suffix;      /* Use this compiler for input files
                           whose names end in this suffix.  */

  const char *spec;       /* To use this compiler, run this spec.  */

  const char *cpp_spec;   /* If non-NULL, substitute this spec
                           for '%C', rather than the usual
                           cpp_spec.  */

  const int combinable;   /* If nonzero, compiler can deal with
                           multiple source files at once (IMA).

  const int needs_preprocessing;
                           /* If nonzero, source files need to
                           be run through a preprocessor.  */
};
```



Default Specs in the Plugin Data Structure in gcc.c

All entries of Objective C/C++ and some entries of Fortran removed.

```
static const struct compiler default_compilers[] =
{
  {".cc", "#C++", 0, 0, 0},          {".cxx", "#C++", 0, 0, 0},
  {".cpp", "#C++", 0, 0, 0},        {".cp", "#C++", 0, 0, 0},
  {".c++", "#C++", 0, 0, 0},        {".C", "#C++", 0, 0, 0},
  {".CPP", "#C++", 0, 0, 0},        {".ii", "#C++", 0, 0, 0},
  {".ads", "#Ada", 0, 0, 0},        {".adb", "#Ada", 0, 0, 0},
  {".f", "#Fortran", 0, 0, 0},      {".F", "#Fortran", 0, 0, 0},
  {".for", "#Fortran", 0, 0, 0},    {".FOR", "#Fortran", 0, 0, 0},
  {".f90", "#Fortran", 0, 0, 0},    {".F90", "#Fortran", 0, 0, 0},
  {".p", "#Pascal", 0, 0, 0},       {".pas", "#Pascal", 0, 0, 0},
  {".java", "#Java", 0, 0, 0},      {".class", "#Java", 0, 0, 0},
  {".c", "@c", 0, 1, 1},
  {".h", "@c-header", 0, 0, 0},
  {".i", "@cpp-output", 0, 1, 0},
  {".s", "@assembler", 0, 1, 0}
}
```



Default Specs in the Plugin Data Structure in gcc.c

All entries of Objective C/C++ and some entries of Fortran removed.

```
static const struct compiler default_compilers[] =
{
  {".cc", "#C++", 0, 0, 0},
  {".cpp", "#C++", 0, 0, 0},
  {".c++", "#C++", 0, 0, 0},
  {".CPP", "#C++", 0, 0, 0},
  {".ads", "#Ada", 0, 0, 0},
  {".f", "#Fortran", 0, 0, 0},
  {".for", "#Fortran", 0, 0, 0},
  {".f90", "#Fortran", 0, 0, 0},
  {".p", "#Pascal", 0, 0, 0},
  {".java", "#Java", 0, 0, 0},
  {".c", "@c", 0, 1, 1},
  {".h", "@c-header", 0, 0, 0},
  {".i", "@cpp-output", 0, 1, 0},
  {".s", "@assembler", 0, 1, 0}
  {".cxx", "#C++", 0, 0, 0},
  {".cp", "#C++", 0, 0, 0},
  {".C", "#C++", 0, 0, 0},
  {".ii", "#C++", 0, 0, 0},
  {".adb", "#Ada", 0, 0, 0},
  {".F", "#Fortran", 0, 0, 0},
  {".FOR", "#Fortran", 0, 0, 0},
  {".F90", "#Fortran", 0, 0, 0},
  {".pas", "#Pascal", 0, 0, 0},
  {".class", "#Java", 0, 0, 0}
}
```

- @: Aliased entry



Default Specs in the Plugin Data Structure in `gcc.c`

All entries of Objective C/C++ and some entries of Fortran removed.

```
static const struct compiler default_compilers[] =
{
  {".cc", "#C++", 0, 0, 0},
  {".cpp", "#C++", 0, 0, 0},
  {".c++", "#C++", 0, 0, 0},
  {".CPP", "#C++", 0, 0, 0},
  {".ads", "#Ada", 0, 0, 0},
  {".f", "#Fortran", 0, 0, 0},
  {".for", "#Fortran", 0, 0, 0},
  {".f90", "#Fortran", 0, 0, 0},
  {".p", "#Pascal", 0, 0, 0},
  {".java", "#Java", 0, 0, 0},
  {".c", "@c", 0, 1, 1},
  {".h", "@c-header", 0, 0, 0},
  {".i", "@cpp-output", 0, 1, 0},
  {".s", "@assembler", 0, 1, 0}
  {".cxx", "#C++", 0, 0, 0},
  {".cp", "#C++", 0, 0, 0},
  {".C", "#C++", 0, 0, 0},
  {".ii", "#C++", 0, 0, 0},
  {".adb", "#Ada", 0, 0, 0},
  {".F", "#Fortran", 0, 0, 0},
  {".FOR", "#Fortran", 0, 0, 0},
  {".F90", "#Fortran", 0, 0, 0},
  {".pas", "#Pascal", 0, 0, 0},
  {".class", "#Java", 0, 0, 0},
}
```

- @: Aliased entry
- #: Default specs not available



Complete Entry for C in gcc.c

```

{"@c",
 /* cc1 has an integrated ISO C preprocessor. We should invoke the
    external preprocessor if -save-temps is given. */
 "%{E|M|MM:%(trad_capable_cpp) %(cpp_options) %(cpp_debug_options)}\
  %{!E:%{!M:%{!MM:\
    %{traditional|ftraditional:\
%eGNU C no longer supports -traditional without -E}\
    %{!combine:\
    %{save-temps|traditional-cpp|no-integrated-cpp:%(trad_capable_cpp) \
%(cpp_options) -o %{save-temps:%b.i} %{!save-temps:%g.i} \n\
    cc1 -fpreprocessed %{save-temps:%b.i} %{!save-temps:%g.i} \
%(cc1_options)}\
    %{!save-temps:%{!traditional-cpp:%{!no-integrated-cpp:\
cc1 %(cpp_unique_options) %(cc1_options)}}}\
    %{!fsyntax-only:%(invoke_as)}} \
    %{combine:\
    %{save-temps|traditional-cpp|no-integrated-cpp:%(trad_capable_cpp) \
%(cpp_options) -o %{save-temps:%b.i} %{!save-temps:%g.i}}\
    %{!save-temps:%{!traditional-cpp:%{!no-integrated-cpp:\
cc1 %(cpp_unique_options) %(cc1_options)}}\
    %{!fsyntax-only:%(invoke_as)}}}}}", 0, 1, 1},

```



Populated Plugin Data Structure for C++:

`gcc/cp/lang-specs.h`

```
{".cc", "@c++", 0, 0, 0},  
{".cp", "@c++", 0, 0, 0},  
{".cxx", "@c++", 0, 0, 0},  
{".cpp", "@c++", 0, 0, 0},  
{".c++", "@c++", 0, 0, 0},  
{".C", "@c++", 0, 0, 0},  
{".CPP", "@c++", 0, 0, 0},  
{".H", "@c++-header", 0, 0, 0},  
{".hpp", "@c++-header", 0, 0, 0},  
{".hp", "@c++-header", 0, 0, 0},  
{".hxx", "@c++-header", 0, 0, 0},  
{".h++", "@c++-header", 0, 0, 0},  
{".HPP", "@c++-header", 0, 0, 0},  
{".tcc", "@c++-header", 0, 0, 0},  
{".hh", "@c++-header", 0, 0, 0},
```



Populated Plugin Data Structure for C++:

gcc/cp/lang-specs.h

```

{"@c++-header",
  "%{E|M|MM:cc1plus -E %(cpp_options) %2 %(cpp_debug_options)}\
  %{!E:%{!M:%{!MM:\
    %{save-temps|no-integrated-cpp:cc1plus -E\
%(cpp_options) %2 -o %{save-temps:%b.ii} %{!save-temps:%g.ii} \n}\
  cc1plus %{save-temps|no-integrated-cpp:-fpreprocessed %{save-temps:%
    %{!save-temps:%{!no-integrated-cpp:%(cpp_unique_options)}}}\
%(cc1_options) %2\
%{!fsyntax-only:%{!fdump-ada-spec*:-o %g.s %{!o*:--output-pch=%i.gch}\
  %W{o*:--output-pch=%*}}%V}}}" ,
  CPLUSPLUS_CPP_SPEC, 0, 0},

```



Populated Plugin Data Structure for C++:

gcc/cp/lang-specs.h

```

{"@c++",
 "%{E|M|MM:cc1plus -E %(cpp_options) %2 %(cpp_debug_options)}\
  %{!E:%{!M:%{!MM:\
    %{save-temps|no-integrated-cpp:cc1plus -E\
%(cpp_options) %2 -o %{save-temps:%b.ii} %{!save-temps:%g.ii} \n}\
  cc1plus %{save-temps|no-integrated-cpp:-fpreprocessed %{save-temps:%
    %{!save-temps:%{!no-integrated-cpp:%(cpp_unique_options)}}}\
%(cc1_options) %2\
    %{!fsyntax-only:%(invoke_as)}}}}",
  CPLUSPLUS_CPP_SPEC, 0, 0},
{".ii", "@c++-cpp-output", 0, 0, 0},

{"@c++-cpp-output",
 "%{!M:%{!MM:%{!E:\
  cc1plus -fpreprocessed %i %(cc1_options) %2\
  %{!fsyntax-only:%(invoke_as)}}}}", 0, 0, 0},

```



Populated Plugin Data Structure for LTO: gcc/lto/lang-specs.h

```
/* LTO contributions to the "compilers" array in gcc.c. */  
  
{"@lto", "lto1 %(cc1_options) %i %{\!fsyntax-only:%(invoke_as)}",  
/*cpp_spec=*/NULL, /*combinable=*/1, /*needs_preprocessing=*/0},
```




What about the Files to be Procecded by the Linker?


- Linking is the last step
- Every file is passed on to linker unless it is suppressed
- If a translator is not found, input file is assumed to be a file for linker



Plugin Structure in cc1




Plugin Structure in cc1

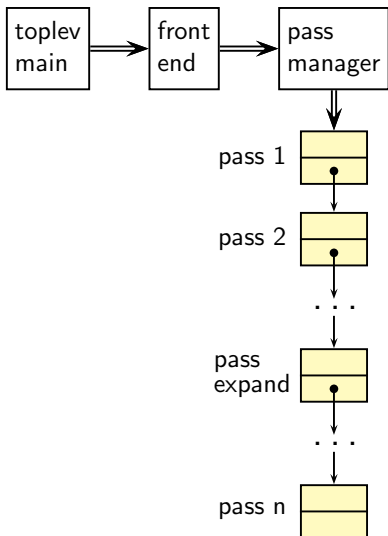


double arrow represents control flow whereas single arrow represents pointer or index




Plugin Structure in cc1

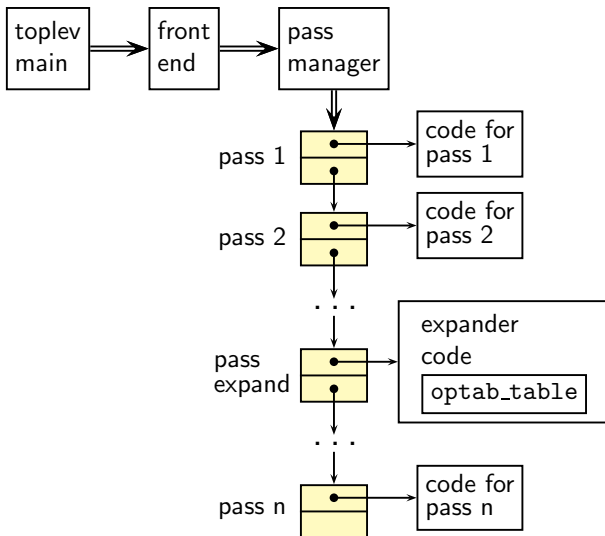


Plugin Structure in cc1

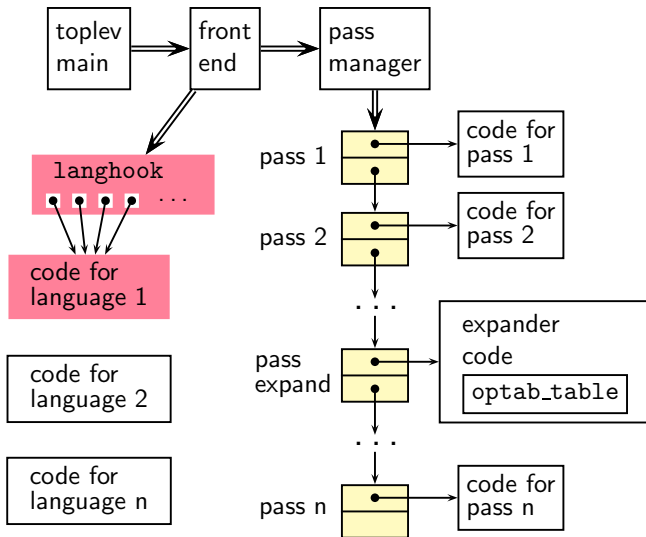


Plugin Structure in cc1

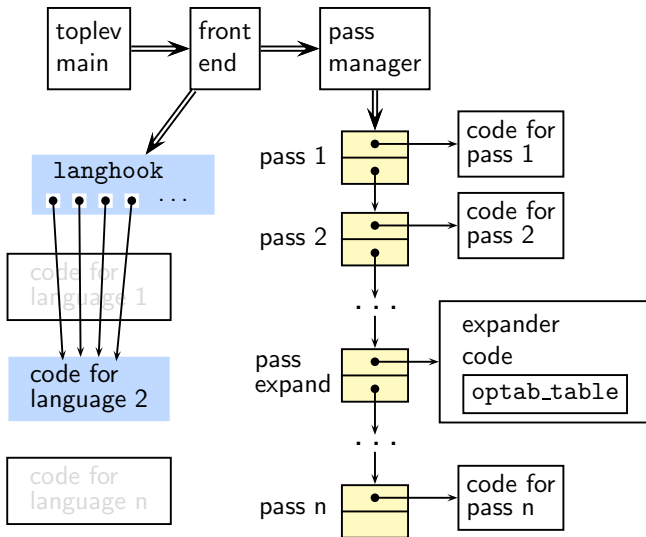


Plugin Structure in cc1

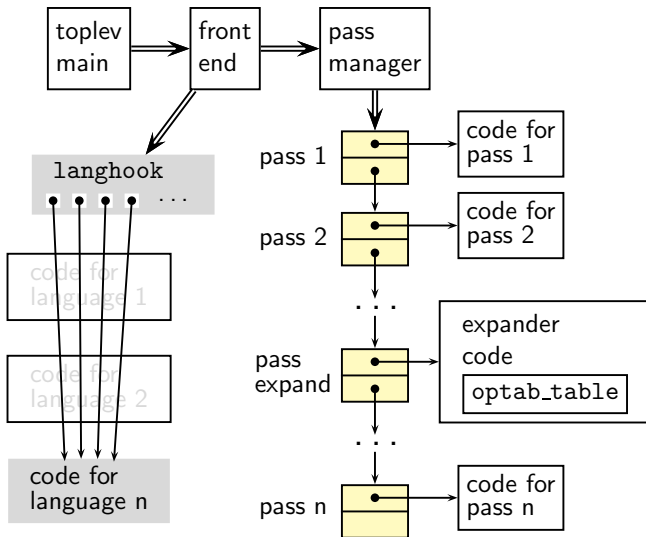


Plugin Structure in cc1

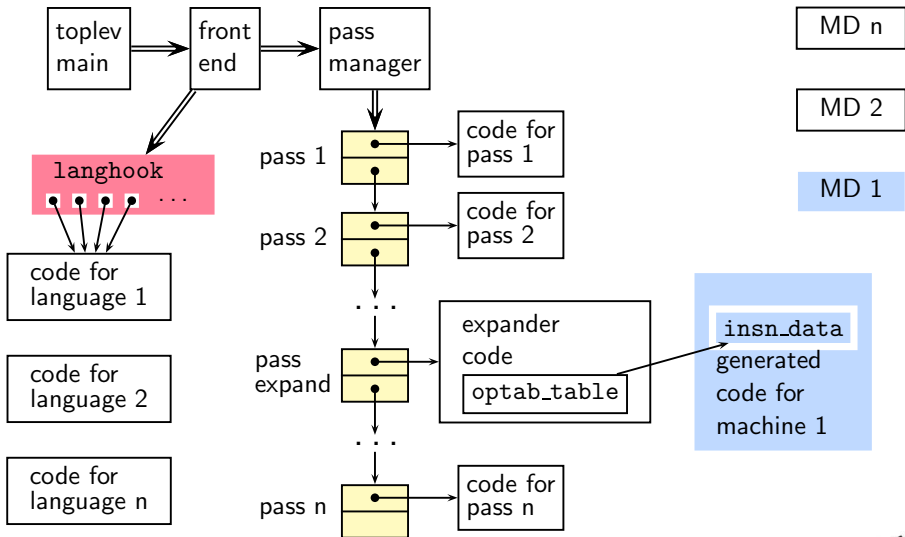

Plugin Structure in cc1

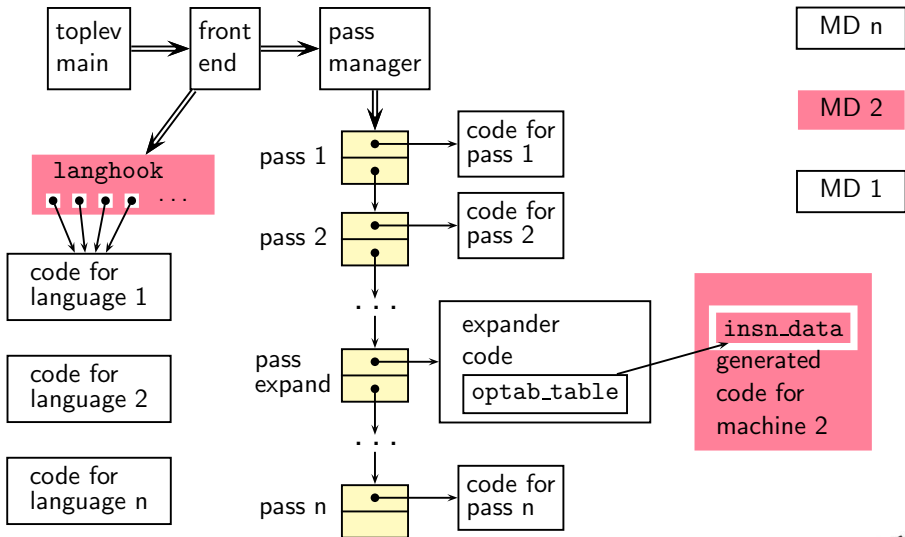

Plugin Structure in cc1

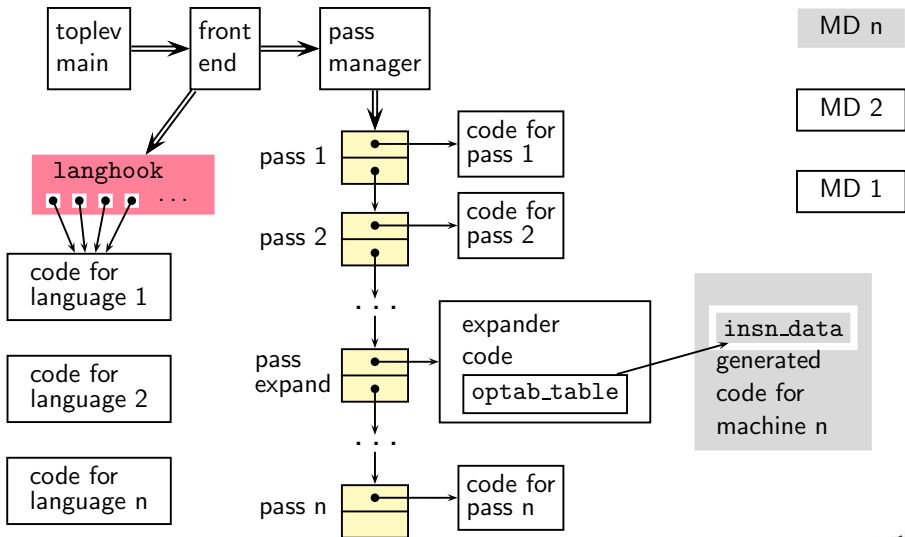

Front End Plugin

Important fields of struct lang_hooks instantiated for C

```
#define LANG_HOOKS_FINISH c_common_finish
#define LANG_HOOKS_EXPAND_EXPR c_expand_expr
#define LANG_HOOKS_PARSE_FILE c_common_parse_file
#define LANG_HOOKS_WRITE_GLOBS c_write_global_declarations
```



Plugins for Intraprocedural Passes

```
struct opt_pass
{
    enum opt_pass_type type;
    const char *name;
    bool (*gate) (void);
    unsigned int (*execute) (void);
    struct opt_pass *sub;
    struct opt_pass *next;
    int static_pass_number;
    timevar_id_t tv_id;
    unsigned int properties_required;
    unsigned int properties_provided;
    unsigned int properties_destroyed;
    unsigned int todo_flags_start;
    unsigned int todo_flags_finish;
};
```

```
struct gimple_opt_pass
{
    struct opt_pass pass;
};

struct rtl_opt_pass
{
    struct opt_pass pass;
};
```



Plugins for Interprocedural Passes

```
struct ipa_opt_pass_d
{
    struct opt_pass pass;
    void (*generate_summary) (void);
    void (*write_summary) (struct cgraph_node_set_def *);
    void (*read_summary) (void);
    void (*function_read_summary) (struct cgraph_node *);
    void (*stmt_fixup) (struct cgraph_node *, gimple *);
    unsigned int function_transform_todo_flags_start;
    unsigned int (*function_transform) (struct cgraph_node *);
    void (*variable_transform) (struct varpool_node *);
};

struct simple_ipa_opt_pass
{
    struct opt_pass pass;
};
```



Predefined Pass Lists

Pass Name	Purpose
<code>all_lowering_passes</code>	Lowering
<code>all_small_ipa_passes</code>	Early optimization passes. Invokes intraprocedural passes over the call graph.
<code>all_regular_ipa_passes</code>	
<code>all_lto_gen_passes</code>	
<code>all_passes</code>	Intraprocedural passes on GIMPLE and RTL



Registering a Pass as a Static Plugin

1. Write the driver function in your file
2. Declare your pass in file `tree-pass.h`:
`extern struct gimple_opt_pass your_pass_name;`
3. Add your pass to the appropriate pass list in `init_optimization_passes()` using the macro `NEXT_PASS`
4. Add your file details to `$(SOURCE)/gcc/Makefile.in`
5. Configure and build gcc
(For simplicity, you can make `cc1` only)
6. Debug `cc1` using `ddd/gdb` if need arises
(For debugging `cc1` from within `gcc`, see:
<http://gcc.gnu.org/ml/gcc/2004-03/msg01195.html>)



Part 3

Dynamic Plugins in GCC

Dynamic Plugins

- Supported on platforms that support `-ldl -rdynamic`
- Loaded using `dlopen` and invoked at pre-determined locations in the compilation process
- Command line option

`-fplugin=/path/to/name.so`

Arguments required can be supplied as name-value pairs



Specifying an Example Pass

```
struct simple_ipa_opt_pass pass_plugin = {
  {
    SIMPLE_IPA_PASS,
    "dynamic_plug",          /* name */
    0,                       /* gate */
    execute_pass_plugin,    /* execute */
    NULL,                    /* sub */
    NULL,                    /* next */
    0,                       /* static pass number */
    TV_INTEGRATION,        /* tv_id */
    0,                       /* properties required */
    0,                       /* properties provided */
    0,                       /* properties destroyed */
    0,                       /* todo_flags start */
    0                         /* todo_flags end */
  }
};
```



Registering Our Pass as a Dynamic Plugin

```
struct register_pass_info pass_info = {
    &(pass_plugin.pass),      /* Address of new pass, here, the
                             struct opt_pass field of
                             simple_ipa_opt_pass defined above */
    "pta",                   /* Name of the reference pass (string
                             in the structure specification) for
                             hooking up the new pass. */
    0,                       /* Insert the pass at the specified
                             instance number of the reference
                             pass. Do it for every instance if
                             it is 0. */
    PASS_POS_INSERT_AFTER   /* how to insert the new pass:
                             before, after, or replace. Here we
                             are inserting our pass the pass
                             named pta */
};
```



Registering Callback for Our Pass for a Dynamic Plugins

```
int plugin_init(struct plugin_name_args *plugin_info,
                struct plugin_gcc_version *version)
{ /* Plugins are activated using this callback */

    register_callback (
        plugin_info->base_name,      /* char *name: Plugin name,
                                     could be any name.
                                     plugin_info->base_name
                                     gives this filename */
        PLUGIN_PASS_MANAGER_SETUP, /* int event: The event code.
                                     Here, setting up a new
                                     pass */
        NULL,                        /* The function that handles
                                     the event */
        &pass_info);                 /* plugin specific data */

    return 0;
}
```



Makefile for Creating and Using a Dynamic Plugin

```
CC = $(INSTALL_D)/bin/gcc
PLUGIN_SOURCES = new-pass.c
PLUGIN_OBJECTS = $(patsubst %.c,%.o,$(PLUGIN_SOURCES ))
GCCPLUGINS_DIR = $(shell $(CC) -print-file-name=plugin)
CFLAGS+= -fPIC -O2
INCLUDE = -Iplugin/include

%.o : %.c
$(CC) $(CFLAGS) $(INCLUDE) -c $<

new-pass.so: $(PLUGIN_OBJECTS)
    $(CC) $(CFLAGS) $(INCLUDE) -shared $^ -o $@

test_plugin: test.c
    $(CC) -fplugin=./new-pass.so $^ -o $@ -fdump-tree-all
```



Part 4

*Flow of Control in the
Generated Compiler*

Walking the Maze of a Large Code Base

- If you use conventional editors such as `vi` or `emacs`

- ▶ Use `cscope`

```
cd $SOURCE
```

```
cscope -R
```

- ▶ Use `ctags`

```
cd $SOURCE
```

```
ctags -R
```

Make sure you use `exeburant-ctags`

- Or use IDE such as `eclipse`



gcc Driver Control Flow

```
main  /* In file gcc.c */
  validate_all_switches
  lookup_compiler
  do_spec
    do_spec_2
      do_spec_1  /* Get the name of the compiler */
  execute
    pex_init
    pex_run
      pex_run_in_environment
      obj->funcs->exec_child
```



gcc Driver Control Flow

```
main    /* In file gcc.c */
  validate_all_switches
  lookup_compiler
  do_spec
    do_spec_2
      do_spec_1 /*
  execute
    pex_init
    pex_run
      pex_run_in
        obj->fu
```

Observations

- All compilers are invoked by this driver
- Assembler is also invoked by this driver
- Linker is invoked in the end by default



cc1 Top Level Control Flow

```
main
  toplev_main  /* In file toplev.c */
    decode_options
    do_compile
      compile_file
        lang_hooks.parse_file => c_common_parse_file
        lang_hooks.decls.final_write_globals =>
                                c_write_global_declarations
        targetm.asm_out.file_end
    finalize
```



cc1 Top Level Control Flow

```
main
  toplev_main  /* In file toplev.c */
  decode_options
  do_compile
    compile_file
      lang_hooks.p
      lang_hooks.d
      targetm.asm_
  finalize
```

Observations

- The entire compilation is driven by functions specified in language hooks
- Not a good design!

declarations



cc1 Control Flow: Parsing for C

```
lang_hooks.parse_file => c_common_parse_file
  c_parse_file
    c_parser_translation_unit
      c_parser_external_declaration
        c_parser_declaration_or_fndef
          c_parser_declspecs /* parse declarations */
          c_parser_compound_statement
          finish_function /* finish parsing */
          c_genericize
          cgraph_finalize_function
          /* finalize AST of a function */
```



cc1 Control Flow: Parsing for C

```
lang_hooks.parse_file => c_common_parse_file
  c_parse_file
    c_parser_translation_unit
```

```
  c_parser_e
```

```
    c_parse
```

```
      c_pa
```

```
      c_pa
```

```
      fini
```

```
      c
```

```
      c
```

```
      /
```

Observations

- GCC has moved to a recursive descent parser from version 4.1.0
- Earlier parser was generated using Bison specification

```
ions */
```

```
 */
```



cc1 Control Flow: Lowering Passes for C

```
lang_hooks.decls.final_write_globals =>
    c_write_global_declarations
cgraph_finalize_compilation_unit
  cgraph_analyze_functions      /* Create GIMPLE */
    cgraph_analyze_function
      gimplify_function_tree
        gimplify_body
          gimplify_stmt
            gimplify_expr
cgraph_lower_function          /* Intraprocedural */
  tree_lowering_passes
    execute_pass_list (all_lowering_passes)
```



cc1 Control Flow: Lowering Passes for C

```

lang_hooks.decls.final_write_globals =>
                                c_write_global_declarations
cgraph_finalize_compilation_unit
  cgraph_analyze                */
  cgraph_anal                    */
  gimpli
  gim
  cgraph_lowe                    */
  tree_low
  execu                          s)

```

Observations

- Lowering passes are language independent
- Yet they are being called from a function in language hooks
- Not a good design!



Organization of Passes

Order	Task	IR	Level	Pass data structure
1	Lowering	GIMPLE	Intra	<code>gimple_opt_pass</code>
2	Optimizations	GIMPLE	Inter	<code>ipa_opt_pass</code>
3	Optimizations	GIMPLE	Intra	<code>gimple_opt_pass</code>
4	RTL Generation	GIMPLE	Intra	<code>rtl_opt_pass</code>
5	Optimization	RTL	Intra	<code>rtl_opt_pass</code>



cc1 Control Flow: Optimization and Code Generation Passes

```
cgraph_analyze_function      /* Create GIMPLE */
...                          /* previous slide */
cgraph_optimize
  ipa_passes
    execute_ipa_pass_list(all_small_ipa_passes) /*!in_lto_p*/
    execute_ipa_summary_passes(all_regular_ipa_passes)
    execute_ipa_summary_passes(all_lto_gen_passes)
    ipa_write_summaries
cgraph_expand_all_functions
  cgraph_expand_function
  /* Intraprocedural passes on GIMPLE, */
  /* expansion pass, and passes on RTL. */
  tree_rest_of_compilation
    execute_pass_list (all_passes)
```



cc1 Control Flow: Optimization and Code Generation Passes

```

cgraph_analyze_function      /* Create GIMPLE */
...                          /* previous slide */
cgraph_optimize
  ipa_passes
    execute_ipa_passes_list(all_small_ipa_passes) /*!in_lto_p*/
    execute_ipa_summary_hooks(ipa_passes)
    execute_ipa_summary_hooks(ipa_passes)
    ipa_write_summaries(ipa_passes)
cgraph_expand_all
  cgraph_expand
  /* Intraprocedural expansion passes */
  /* expansion passes */
  tree_rest_of_function
  execut

```

Observations

- Optimization and code generation passes are language independent
- Yet they are being called from a function in language hooks
- Not a good design!




Execution Order in Intraprocedural Passes


	Function 1	Function 2	Function 3	Function 4	Function 5
Pass 1	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
Pass 2	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
Pass 3	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
Pass 4	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
Pass 5	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>




Execution Order in Intraprocedural Passes

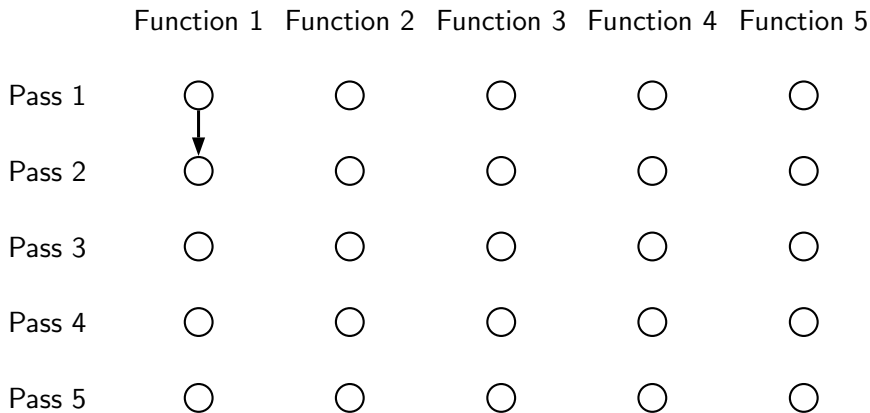


Execution Order in Intraprocedural Passes

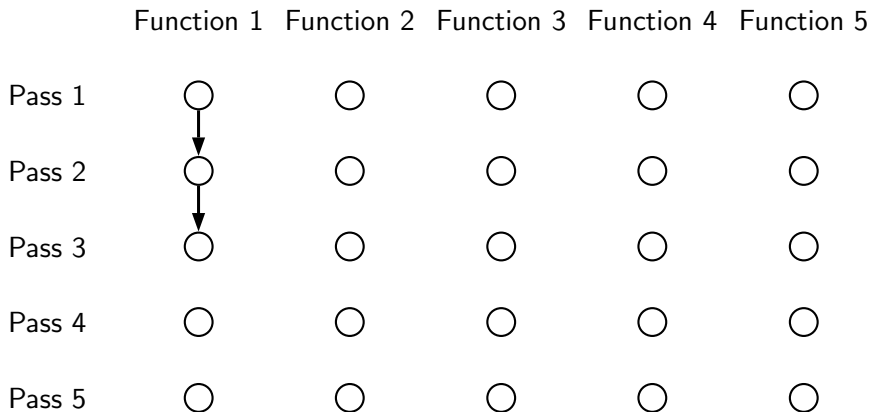


Execution Order in Intraprocedural Passes

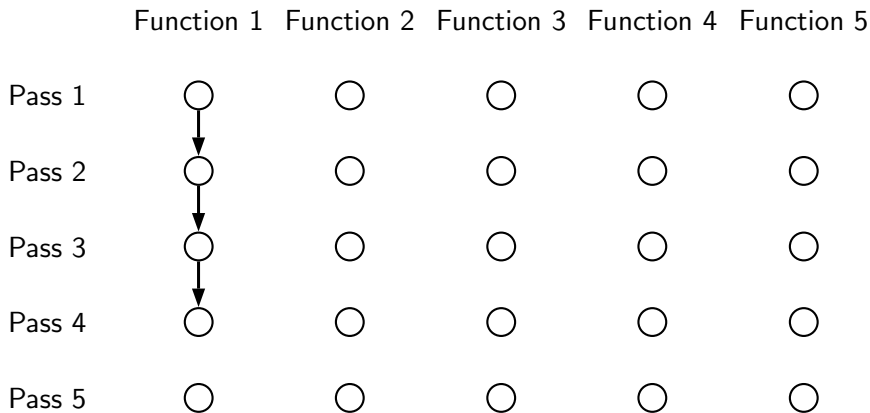


Execution Order in Intraprocedural Passes

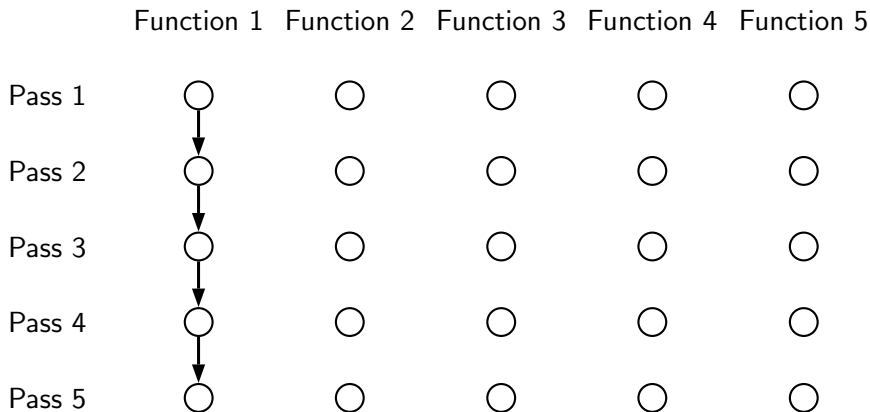


Execution Order in Intraprocedural Passes

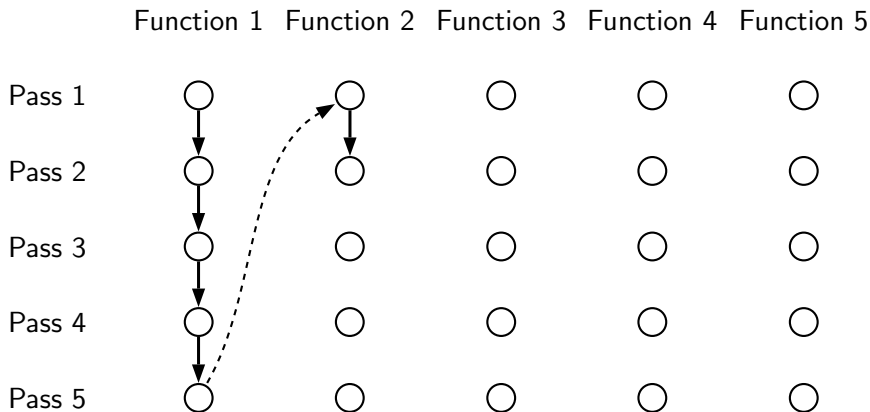


Execution Order in Intraprocedural Passes

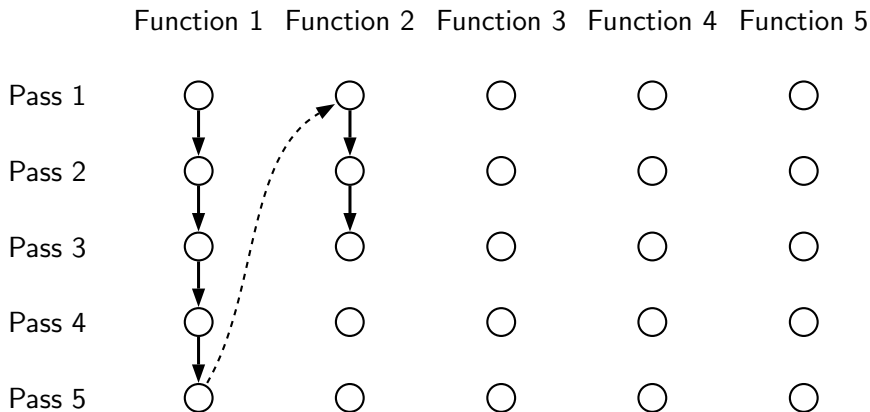


Execution Order in Intraprocedural Passes

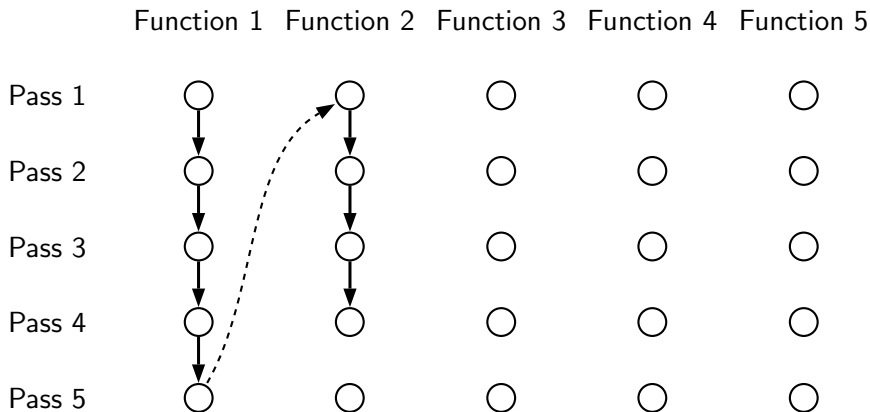


Execution Order in Intraprocedural Passes

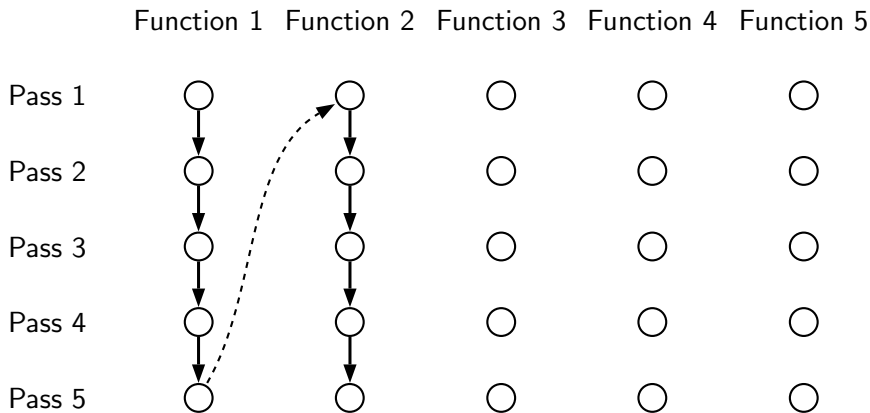


Execution Order in Intraprocedural Passes

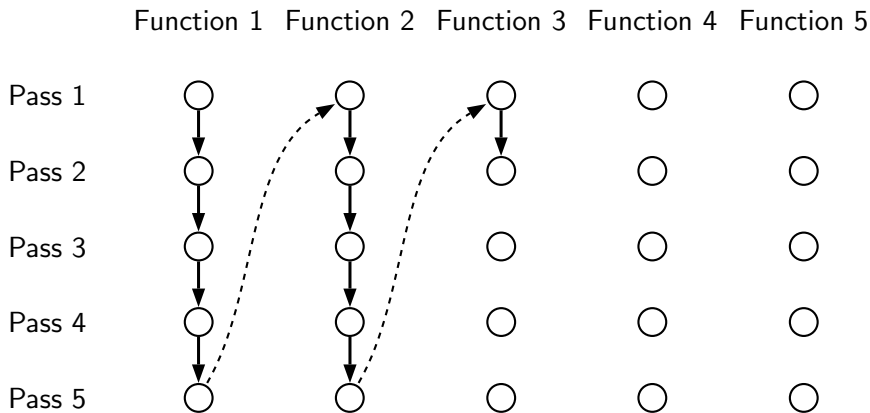


Execution Order in Intraprocedural Passes

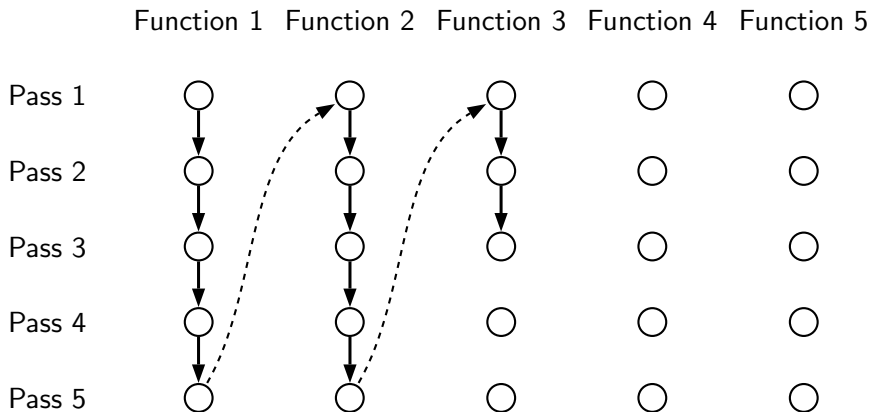


Execution Order in Intraprocedural Passes

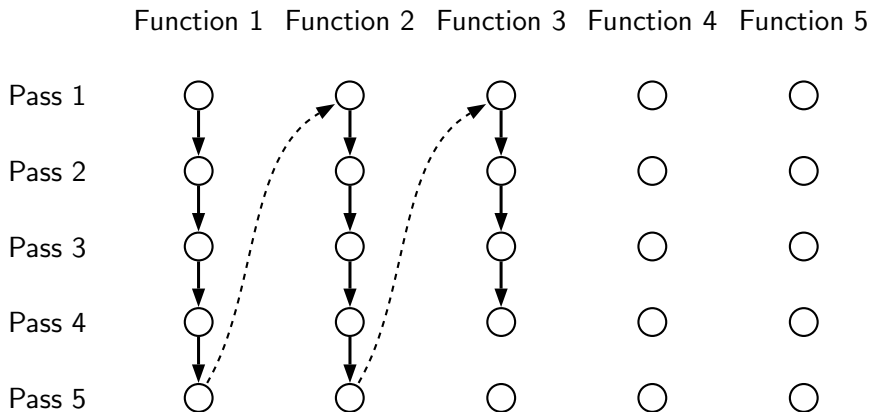


Execution Order in Intraprocedural Passes

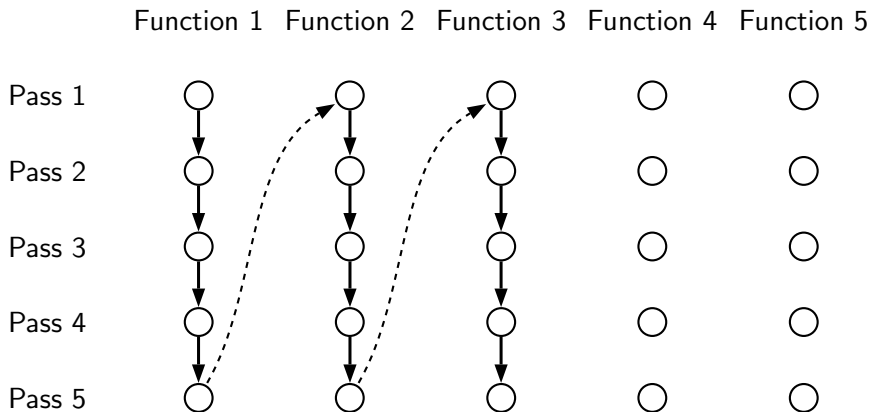


Execution Order in Intraprocedural Passes

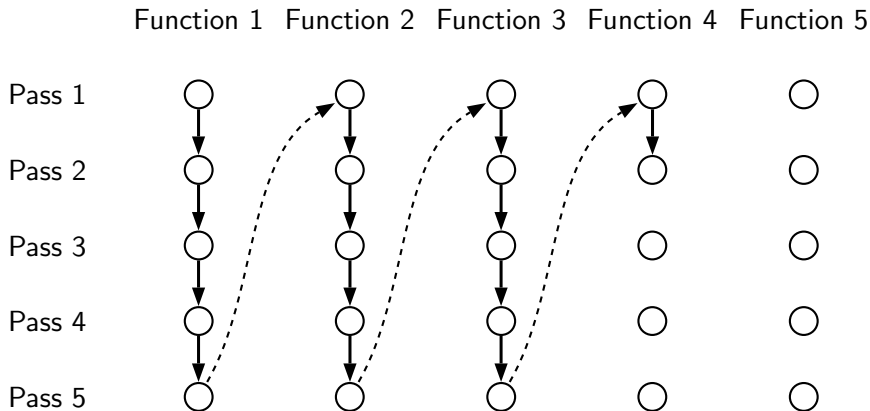


Execution Order in Intraprocedural Passes

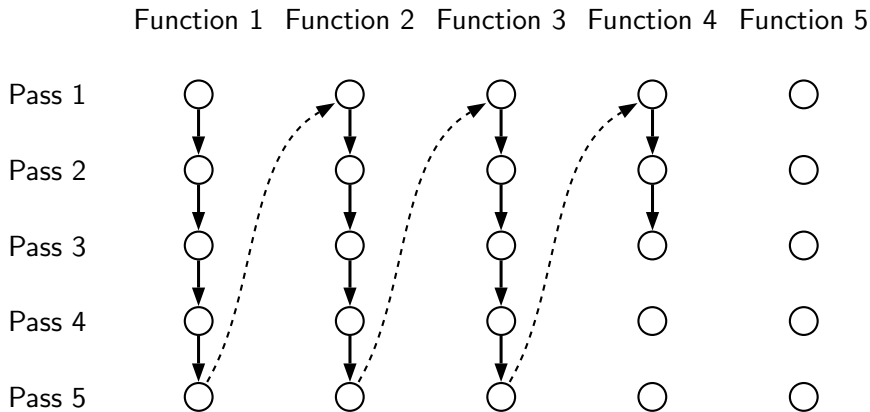


Execution Order in Intraprocedural Passes

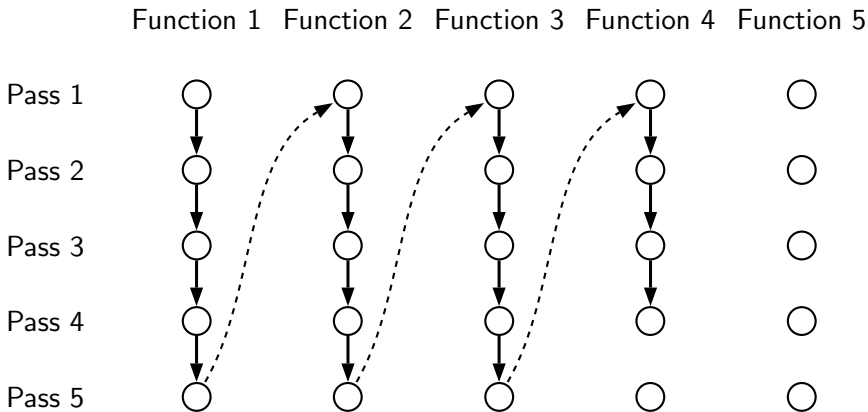


Execution Order in Intraprocedural Passes

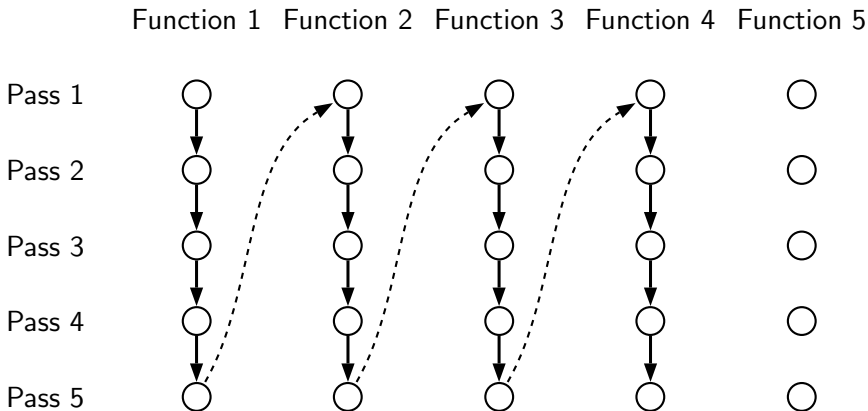


Execution Order in Intraprocedural Passes

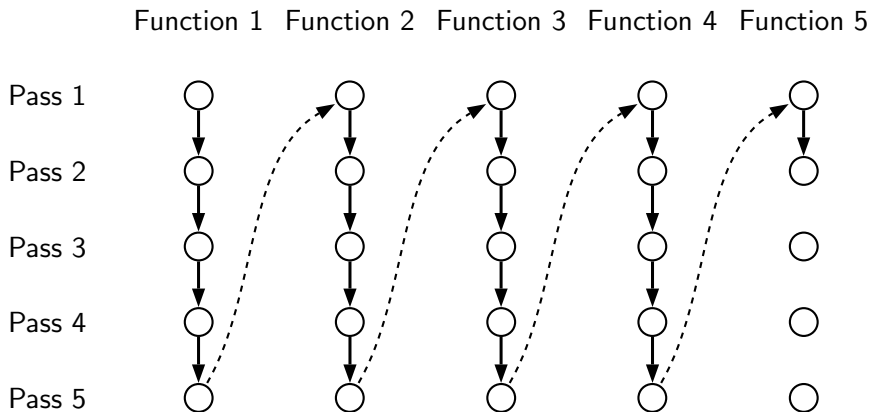


Execution Order in Intraprocedural Passes

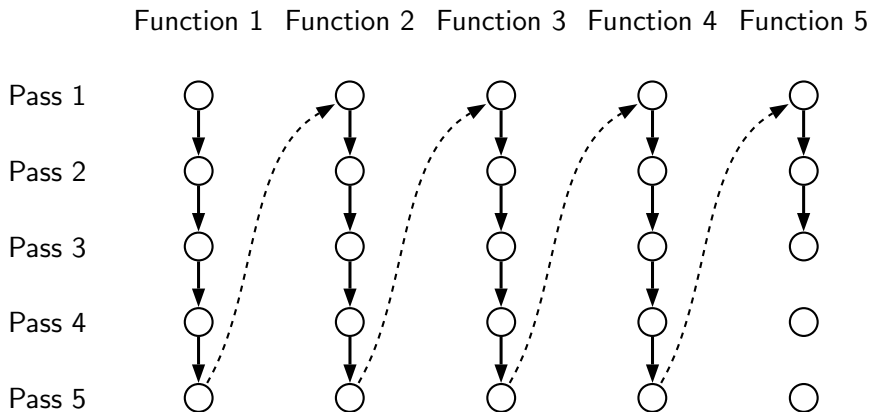

Execution Order in Intraprocedural Passes

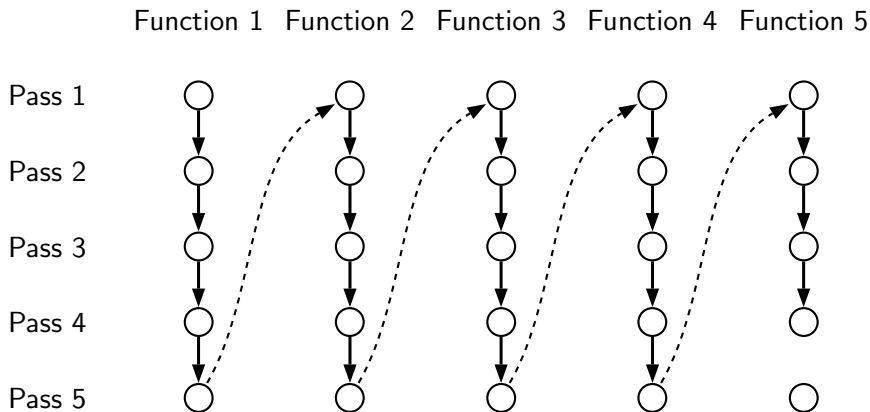

Execution Order in Intraprocedural Passes

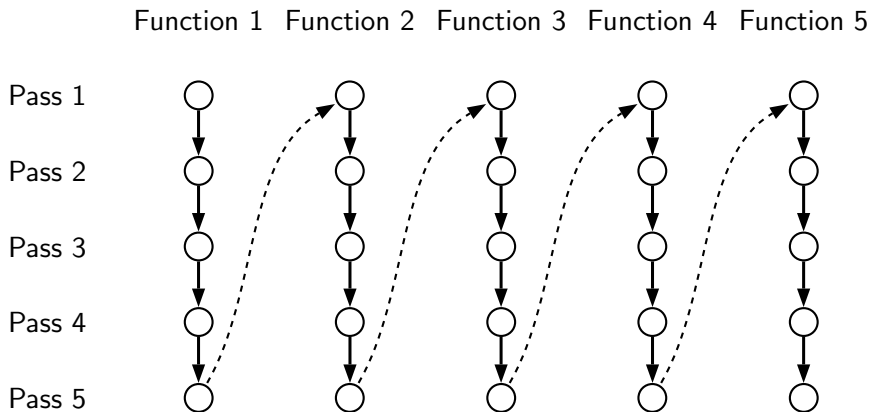


Execution Order in Interprocedural Passes


	Function 1	Function 2	Function 3	Function 4	Function 5
Pass 1	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
Pass 2	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
Pass 3	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
Pass 4	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
Pass 5	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>




Execution Order in Interprocedural Passes

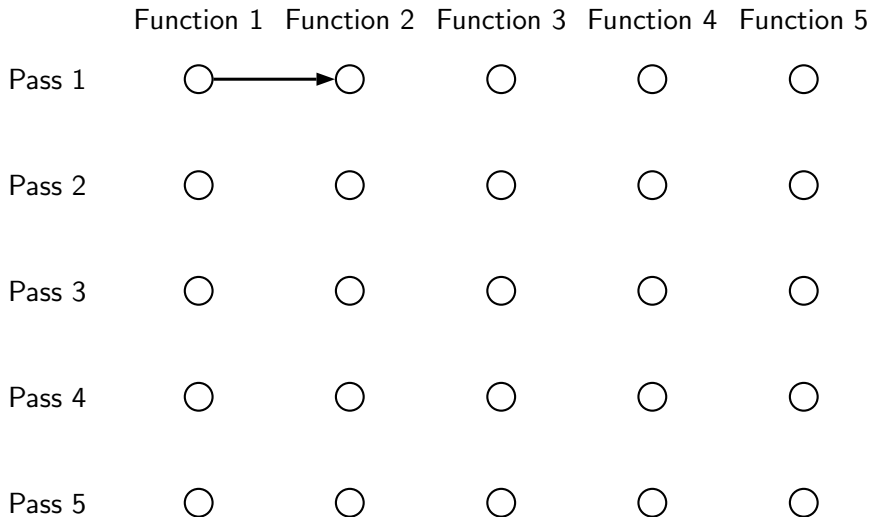


Execution Order in Interprocedural Passes

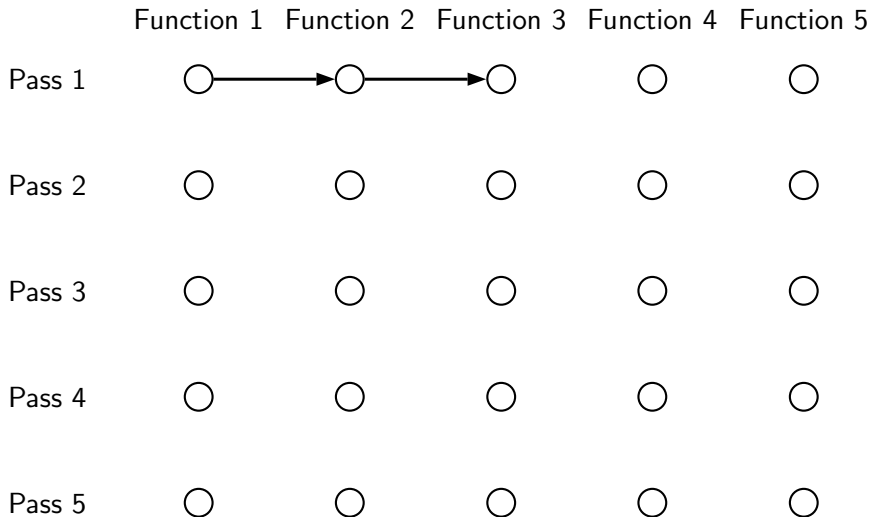


Execution Order in Interprocedural Passes

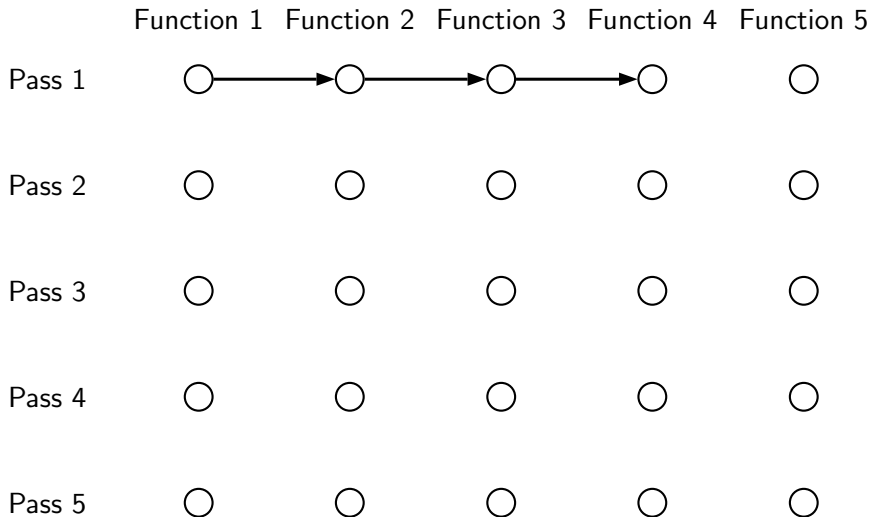


Execution Order in Interprocedural Passes

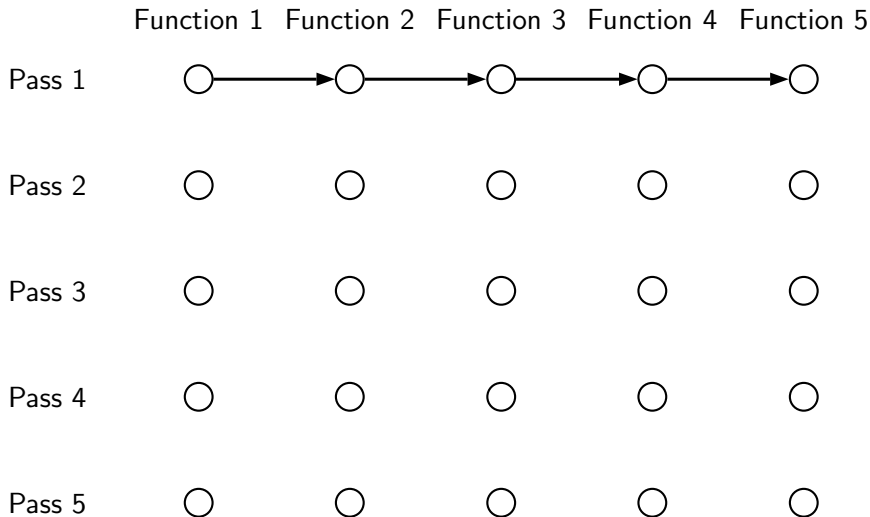


Execution Order in Interprocedural Passes

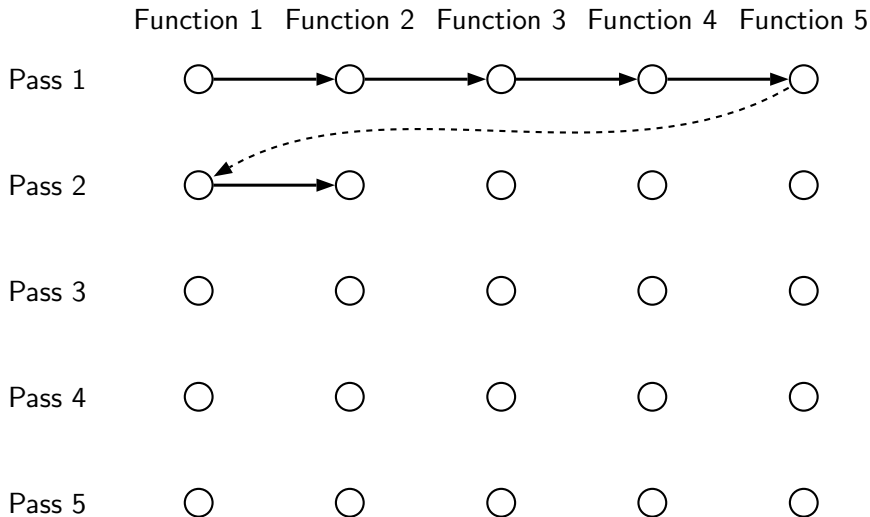


Execution Order in Interprocedural Passes

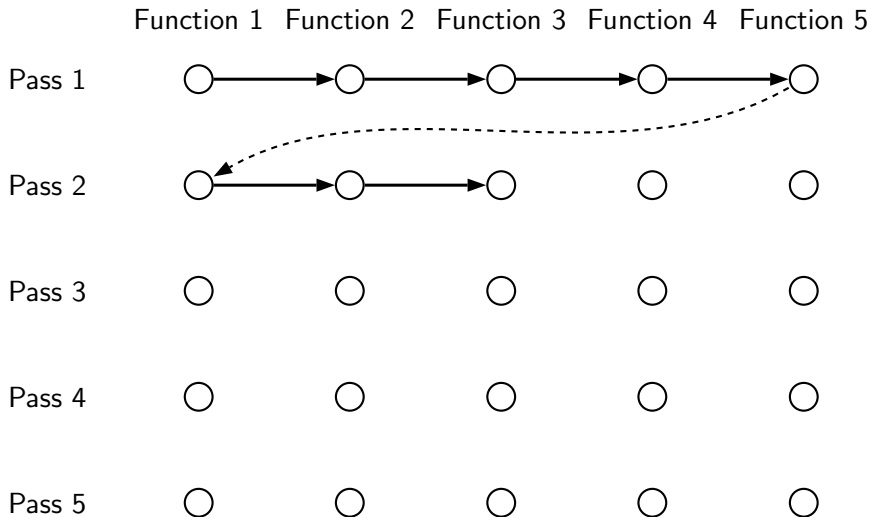


Execution Order in Interprocedural Passes

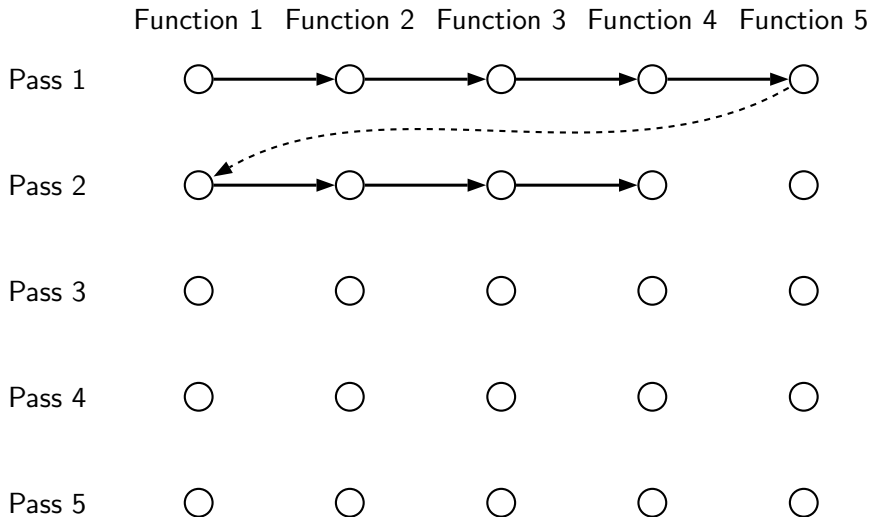


Execution Order in Interprocedural Passes

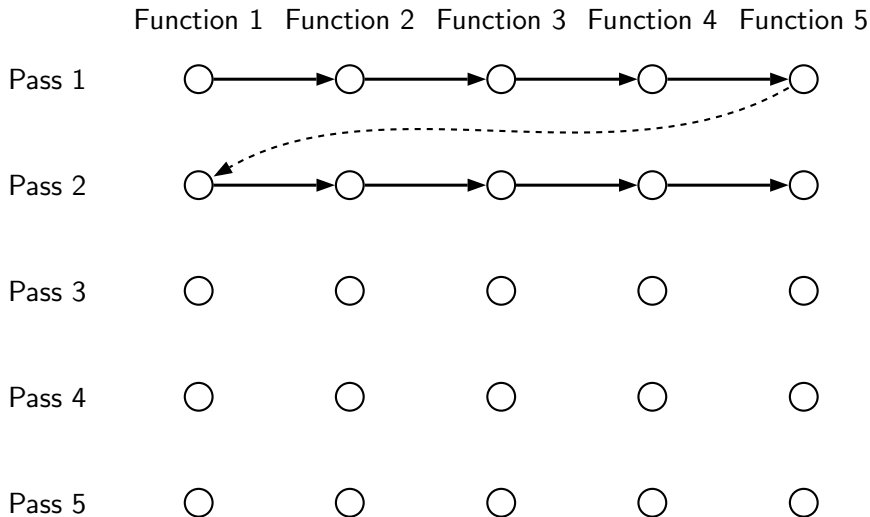


Execution Order in Interprocedural Passes

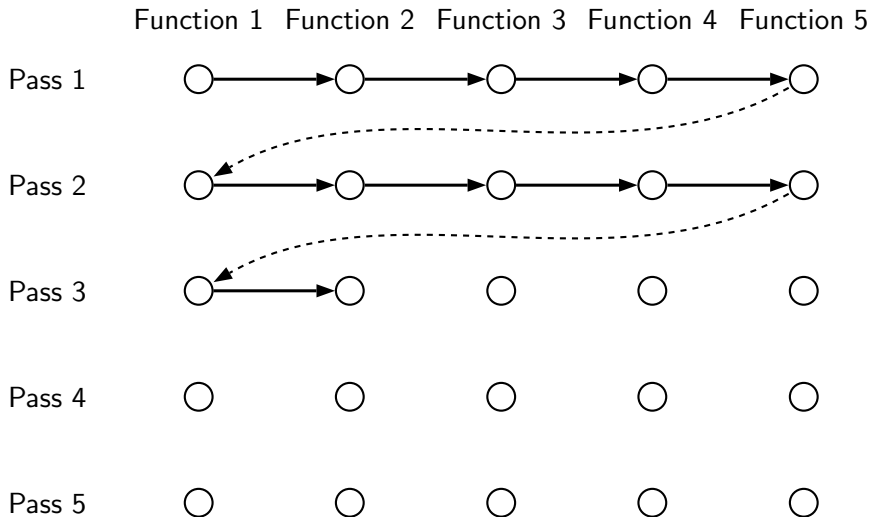


Execution Order in Interprocedural Passes

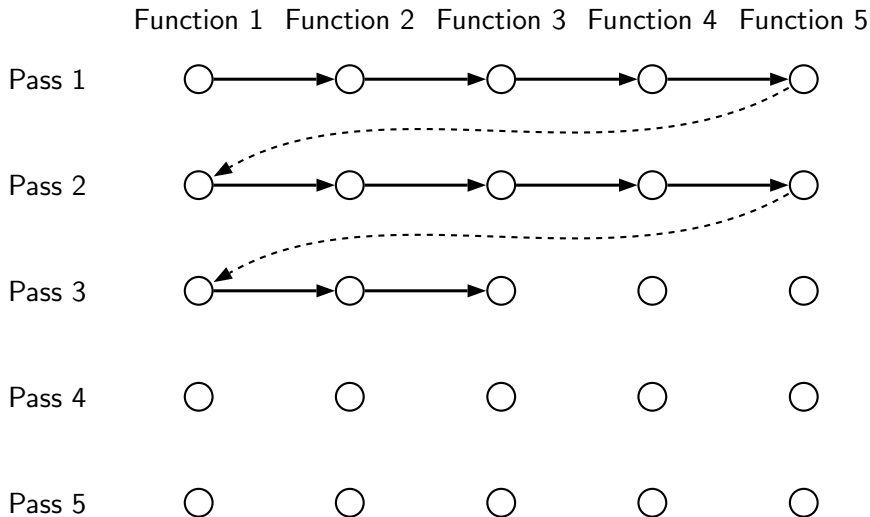


Execution Order in Interprocedural Passes

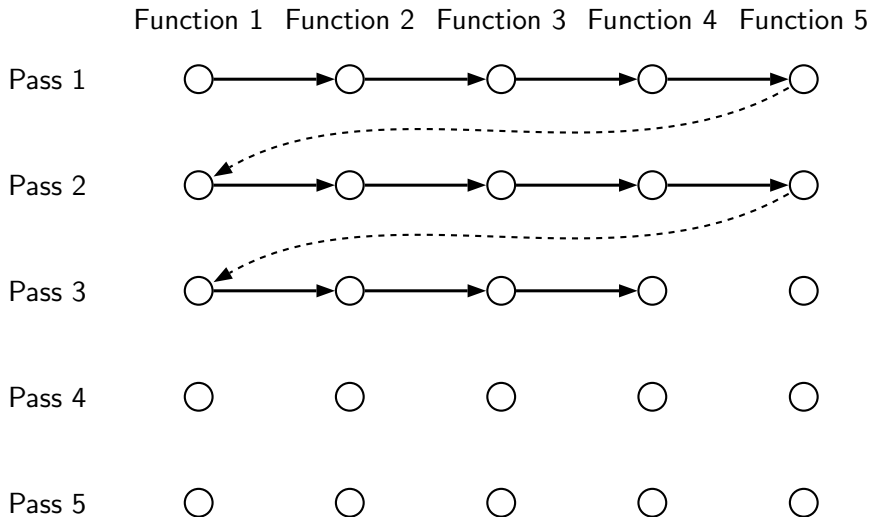


Execution Order in Interprocedural Passes

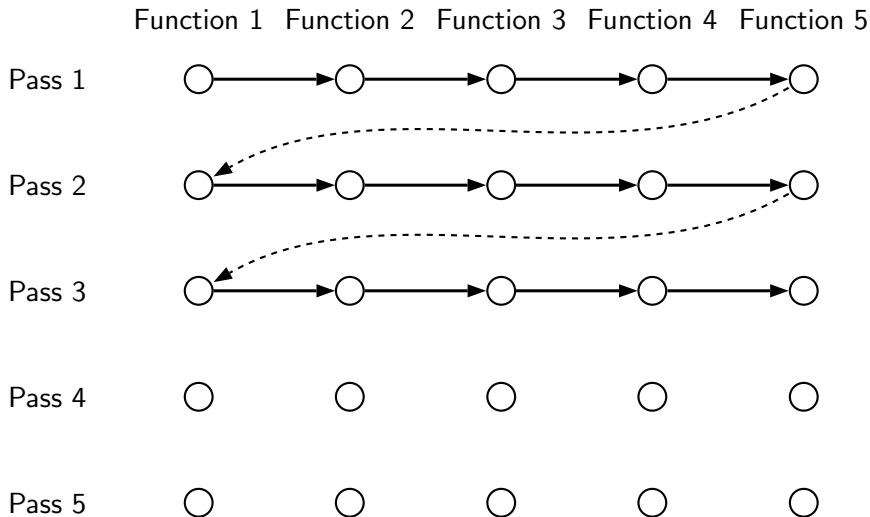


Execution Order in Interprocedural Passes

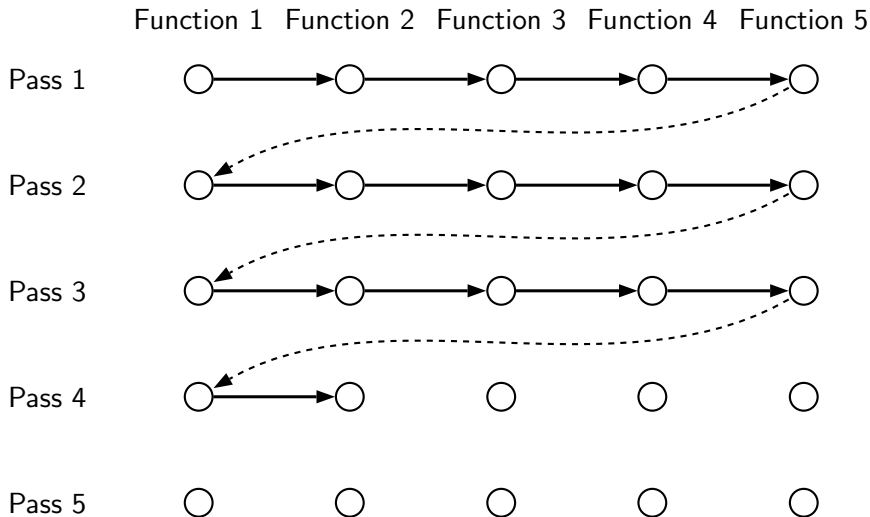


Execution Order in Interprocedural Passes

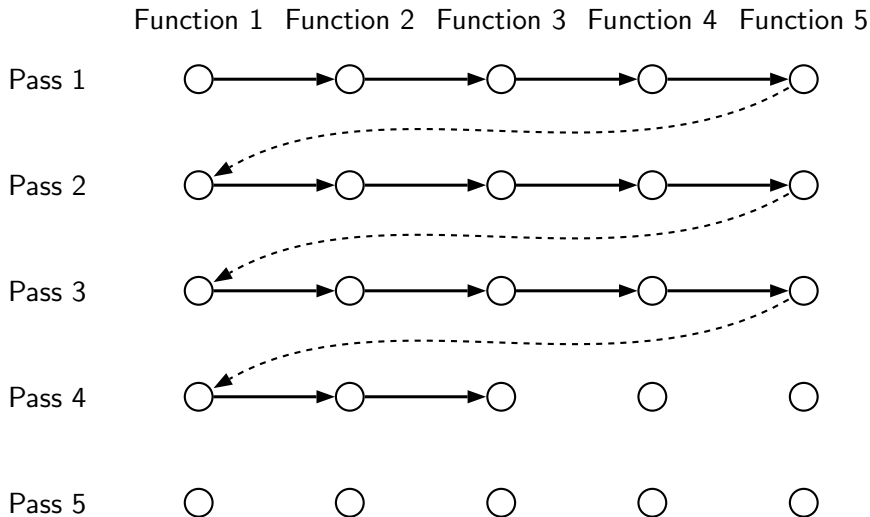


Execution Order in Interprocedural Passes

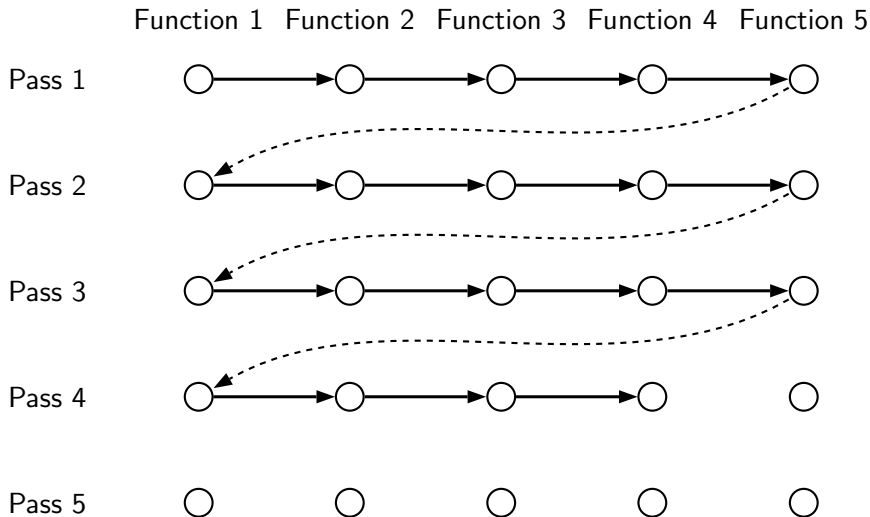


Execution Order in Interprocedural Passes

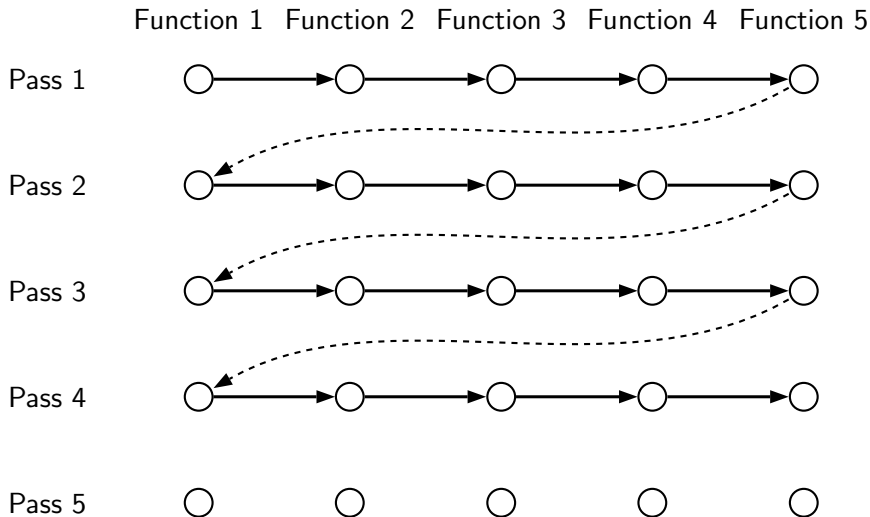


Execution Order in Interprocedural Passes

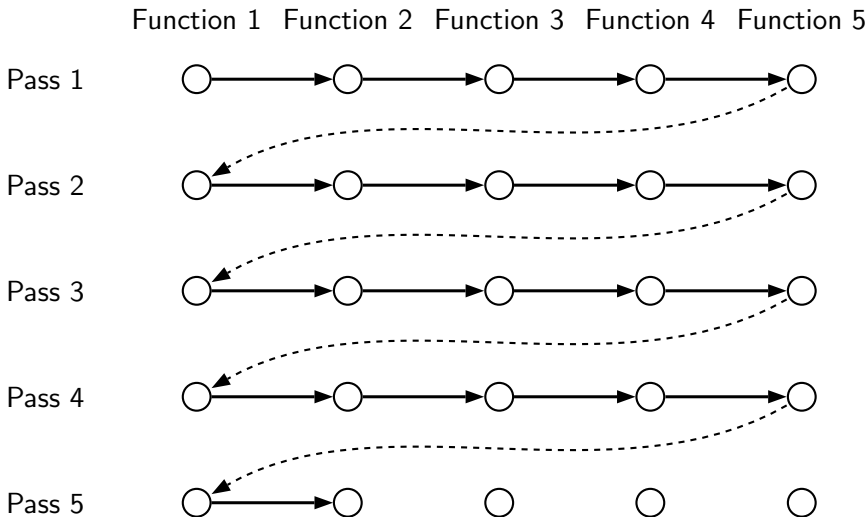

Execution Order in Interprocedural Passes

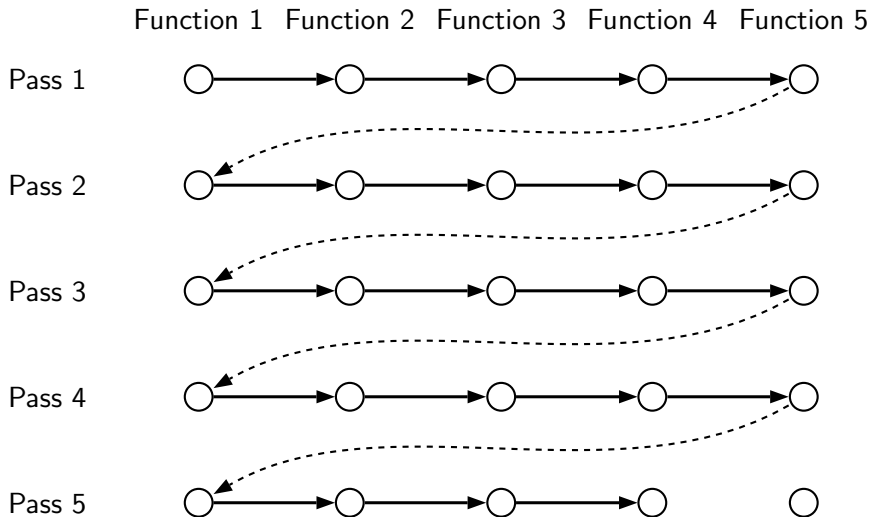

Execution Order in Interprocedural Passes

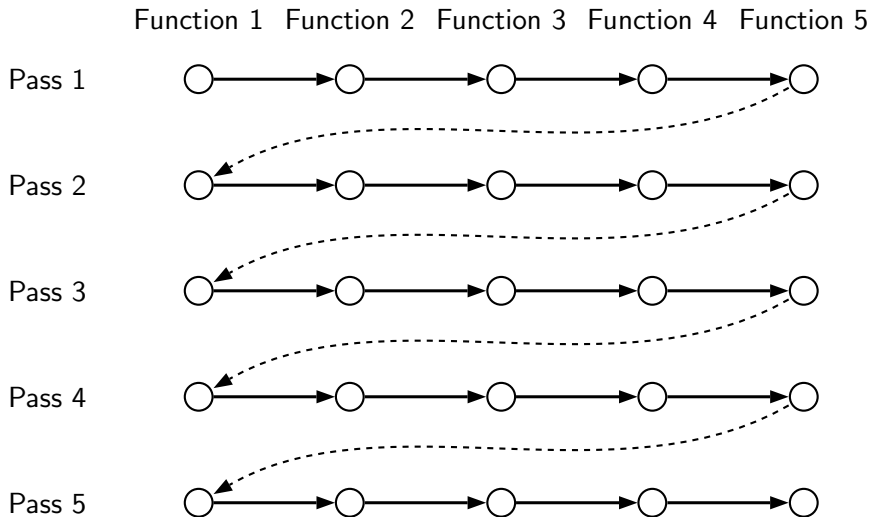

cc1 Control Flow: GIMPLE to RTL Expansion (pass_expand)

```
gimple_expand_cfg
  expand_gimple_basic_block(bb)
  expand_gimple_cond(stmt)
  expand_gimple_stmt(stmt)
  expand_gimple_stmt_1 (stmt)
  expand_expr_real_2
    expand_expr /* Operands */
      expand_expr_real
  optab_for_tree_code
  expand_binop /* Now we have rtx for operands */
  expand_binop_directly
    /* The plugin for a machine */
    code=optab_handler(binoptab,mode);
    GEN_FCN
    emit_insn
```



Part 5

LTO: Link Time Optimization

Link Time Optimization

- Default cgraph creation is restricted to a translation unit (i.e. a single file)
- Interprocedural analysis and optimization across files is not possible by default
- All files (or their equivalents) are available at link time (assuming static linking)
- LTO in GCC is basically interprocedural optimizations of functions across different files



Link Time Optimization

- LTO framework supported in GCC-4.6.0
- Use `-flto` option during compilation
- Generates conventional `.o` files and inserts GIMPLE level information in them
Complete translation is performed in this phase
- During linking all object modules are put together and `lto1` is invoked
It re-executes optimization passes from the function `cgraph_optimize`

Basic Idea: Provide a larger call graph to regular ipa passes



Understanding LTO Framework

```
main ()  
{  
    printf ("hello, world\n");  
}
```



Assembly Output without LTO Information (1)

```
.file "t0.c"
.section .rodata
.LC0:
.string "hello, world"
.text
.globl main
.type main, @function
main:
.LFB0:
.cfi_startproc
pushl %ebp
.cfi_def_cfa_offset 8
.cfi_offset 5, -8
movl %esp, %ebp
.cfi_def_cfa_register 5
andl $-16, %esp
|
subl $16, %esp
movl $.LC0, (%esp)
call puts
leave
.cfi_restore 5
.cfi_def_cfa 4, 4
ret
.cfi_endproc
.LFE0:
.size main, .-main
.ident "GCC: (GNU) 4.6.0"
.section .note.GNU-stack,"",@progbits
```



Assembly Output with LTO Information (2)

```
.ascii "\007"
.text
.section .gnu.lto_.refs.6a5c5521,"",@progbits
.string "x\234cb' '\006b&\006\030"
.string ""
.string ""
.string "t"
.ascii "\b"
.text
.section .gnu.lto_.statics.6a5c5521,"",@progbits
.string "x\234cb' '\b\300\016@\342\214\020&"
.string ""
.string "\330"
.ascii "\b"
.text
.section .gnu.lto_.decls.6a5c5521,"",@progbits
.string "x\234\225R=0\002A\020}\273w\352\236\247(Q/\!\026\!\!F-\214\
.ascii "\021A\360\003\254\355\314jG\207\263w\007\334E\2058\311\333
.ascii "\331\371|s\307\341I\206\320&\251s'\226t\272\260\210\236({\
.ascii "\260\213\237\242\336\207\b{\204}B\222p@\320}\277F8\3
```



Assembly Output with LTO Information (3)

```
.ascii "\342\312)\254G\204\323j\307\035\207[w\230qN\204\032gB2\33
.ascii "\025\304$\033\365U\241\f\341\033\314\255a\225\376\237#Y\t\
.ascii "&|}\215\273\276\245{\342\255\374n\f\035b\332\213\236/#\221
.ascii "\321\253.Y\021q/ \320\310\0166\322\303\305\275^\357L\373\3
.ascii "\017'f\005\227D\267\3400\333\365Z\325_8h\217j\367f-\034j\3
.ascii "!r\237y[\f\344\231x\302\034\335\222\301{\343\317@\204\371\
.ascii "\\ \211u}p\324\351\252\201\307\213^\262\027\3757S\311j0\257
.ascii "\277\302$[\325\006\r\247\275\0207\376\nLu\246\221\254\n+\3
.ascii "\007\367\251\3001\251\244h\003\223\216\350\354\254\016\343
.ascii "\033M\210\356\242\272\211\375\352\005\314\2201F\215\2320\3
.ascii "zx\236t0f\334\237\273\201\350\255\356}\334\017\376F\344\20
.ascii "v\222\366\006\206\316V\226S\320S\351\243\323\221\354q6{\23
.ascii "| \003\262q\030\362"
.text
.section .gnu.lto_ .symtab.6a5c5521, "", @progbits
.string "main"
.string ""
.string ""
.string ""
.string ""
```



Assembly Output with LTO Information (4)

```
.string ""
.string ""
.string ""
.string ""
.string ""
.string ""
.string ""
.string "K"
.string ""
.string ""
.text
.section .gnu.lto_.opts,"",@progbits
.string "x\234cb'\340\002bs\006\b'\002\021\r\f\f\273\230\031\030\
.ascii "\002\370\tL"
.text
.section .rodata
.LC0:
.string "hello, world"
```



Assembly Output with LTO Information (5)

```
.text
.globl main
.type main, @function

main:
.LFB0:

.cfi_startproc
pushl %ebp
.cfi_def_cfa_offset 8
.cfi_offset 5, -8
movl %esp, %ebp
.cfi_def_cfa_register 5
andl $-16, %esp
subl $16, %esp
movl $.LC0, (%esp)
call puts
```



Assembly Output with LTO Information (6)

```
leave
.cfi_restore 5
.cfi_def_cfa 4, 4
ret
.cfi_endproc
.LFE0:
.size main, .-main
.comm __gnu_lto_v1,1,1
.ident "GCC: (GNU) 4.6.0"
.section .note.GNU-stack,"",@progbits
```



lto1 Control Flow

```
lto_main
  lto_process_name
  lto_init_reader
  read_cgraph_and_symbols
    if (flag_wpa)
      {
        do_whole_program_analysis
        materialize_cgraph
        execute_ipa_pass_list (all_regular_ipa_passes)
      }
    else
      {
        materialize_cgraph
        cgraph_optimize
      }
```



cc1 Control Flow: A Recap

```
toplev_main  /* In file toplev.c */
  compile_file
    lang_hooks.parse_file=>c_common_parse_file
    lang_hooks.decls.final_write_globals=>c_write_global_declarations
    cgraph_finalize_compilation_unit
      cgraph_analyze_functions      /* Create GIMPLE */
      cgraph_analyze_function      /* Create GIMPLE */
      ...
    cgraph_optimize
      ipa_passes
        execute_ipa_pass_list(all_small_ipa_passes) /*!in lto*/
        execute_ipa_summary_passes(all_regular_ipa_passes)
        execute_ipa_summary_passes(all_lto_gen_passes)
        ipa_write_summaries
      cgraph_expand_all_functions
      cgraph_expand_function
      /* Intraprocedural passes on GIMPLE, */
      /* expansion pass, and passes on RTL. */
```



cc1 and lto1

```
toplevel_main
...
  compile_file
  ...
    cgraph_analyze_function
```

```
cc1
  cgraph_optimize
  ...
    ipa_passes
  ...
    cgraph_expand_all_functions
  ...
    tree_rest_of_compilation
```



cc1 and lto1

```
toplevel_main
...
  compile_file
  ...
    cgraph_analyze_function
```




```
lto_main
...
  read_cgraph_and_symbols
  ...
    materialize_cgraph
```

```
cgraph_optimize
...
  ipa_passes
  ...
    cgraph_expand_all_functions
    ...
      tree_rest_of_compilation
```

lto1




Our Pictorial Convention


Source code	
cc1 executable	
lto1 executable	



The GNU Tool Chain: Our First Picture

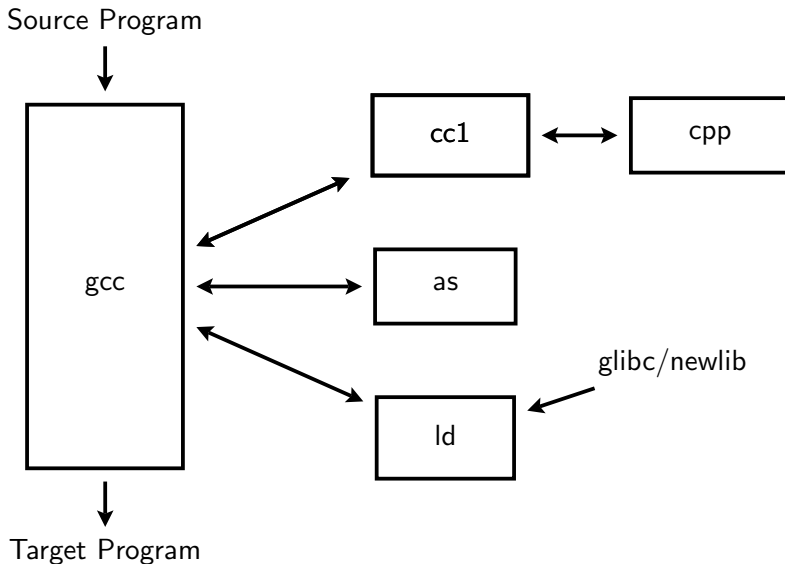

The GNU Tool Chain: Our First Picture

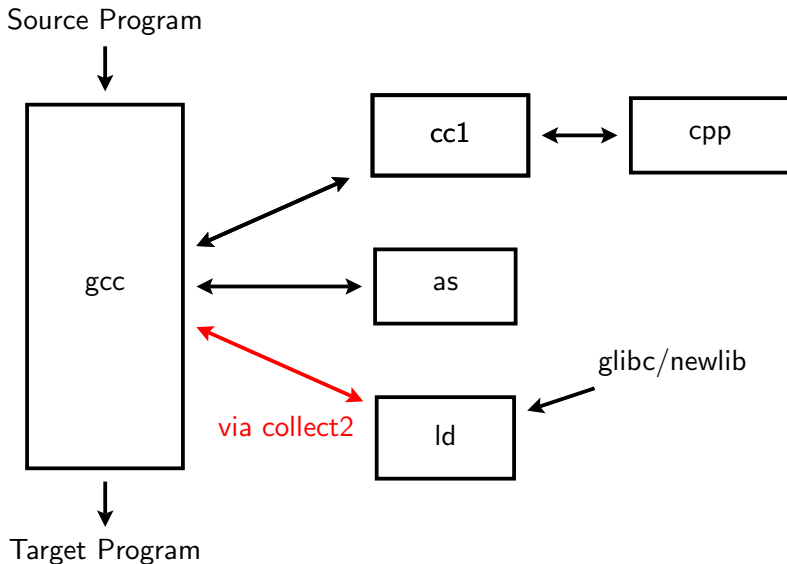


The GNU Tool Chain for LTO Support




gcc




The GNU Tool Chain for LTO Support

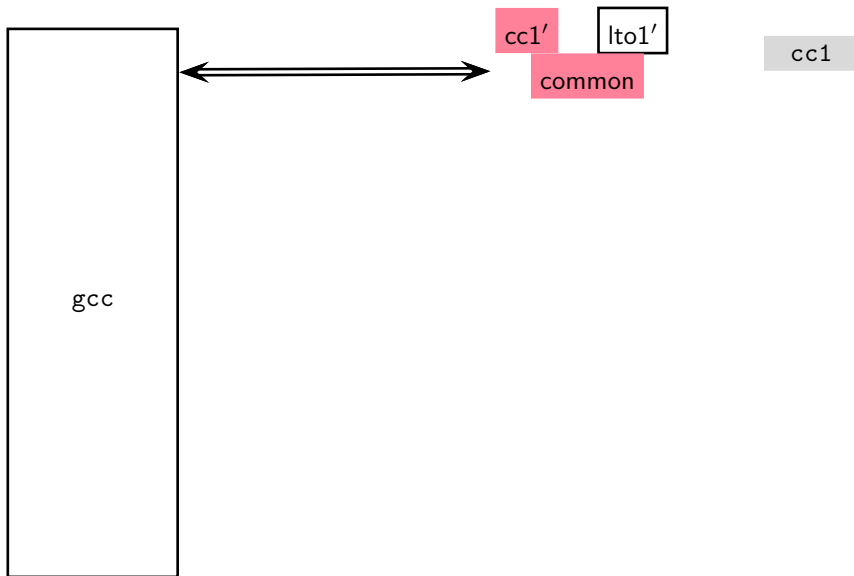


The GNU Tool Chain for LTO Support

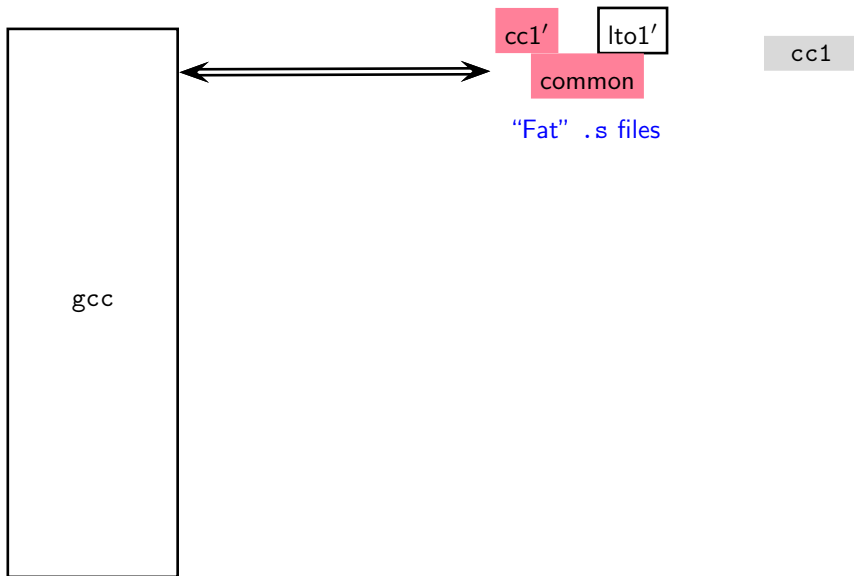


The GNU Tool Chain for LTO Support

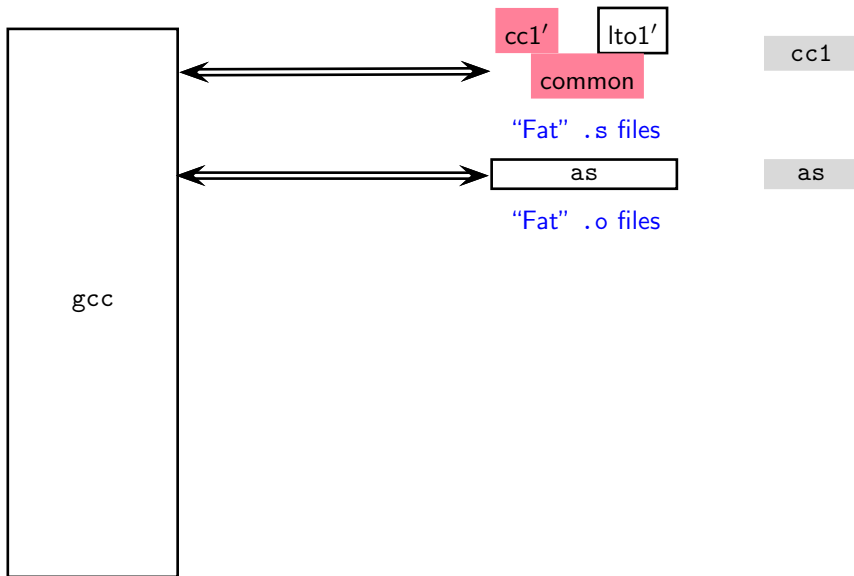


The GNU Tool Chain for LTO Support

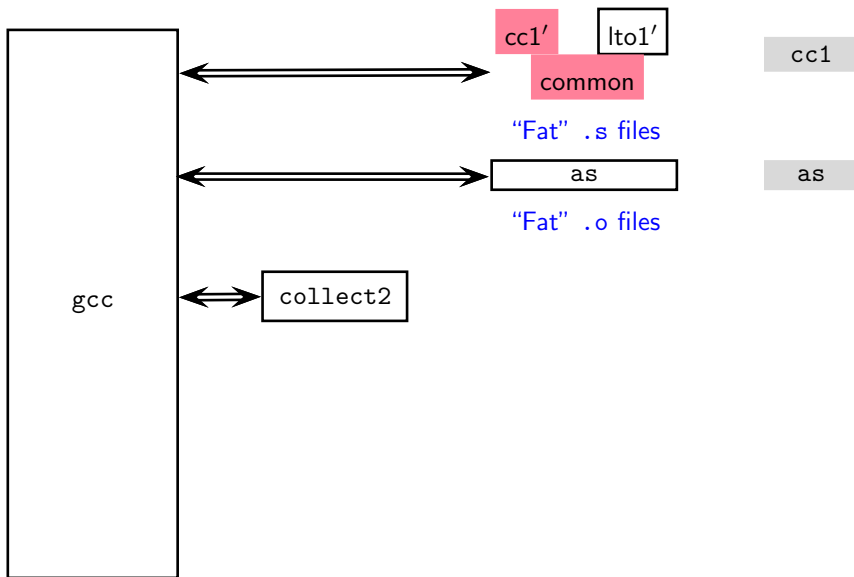


The GNU Tool Chain for LTO Support

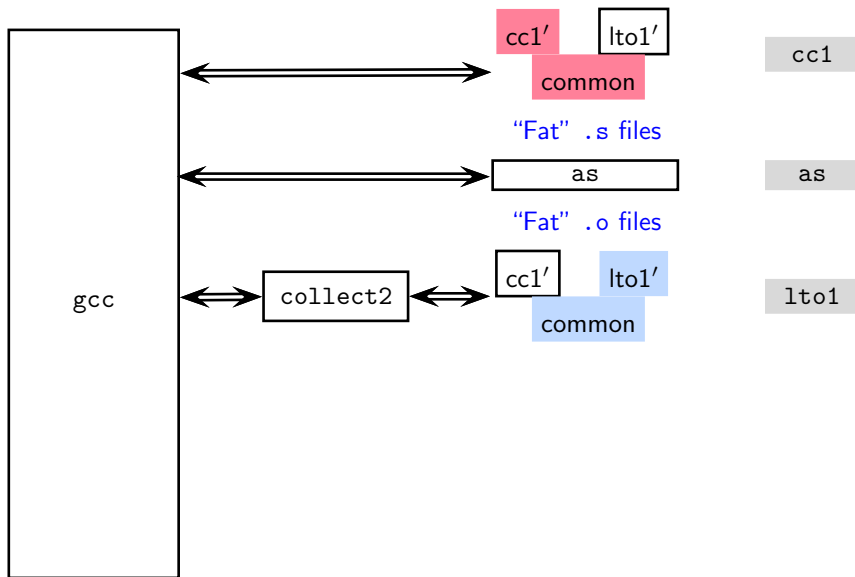


The GNU Tool Chain for LTO Support

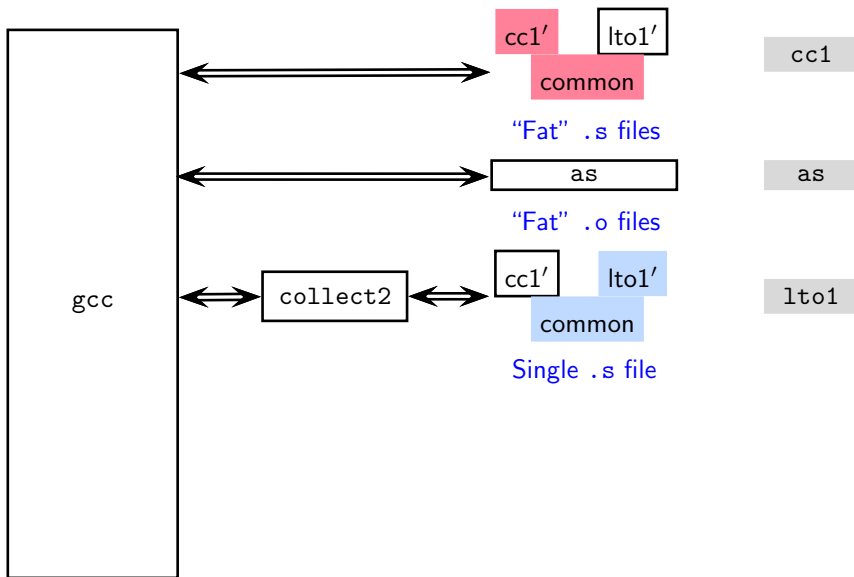


The GNU Tool Chain for LTO Support

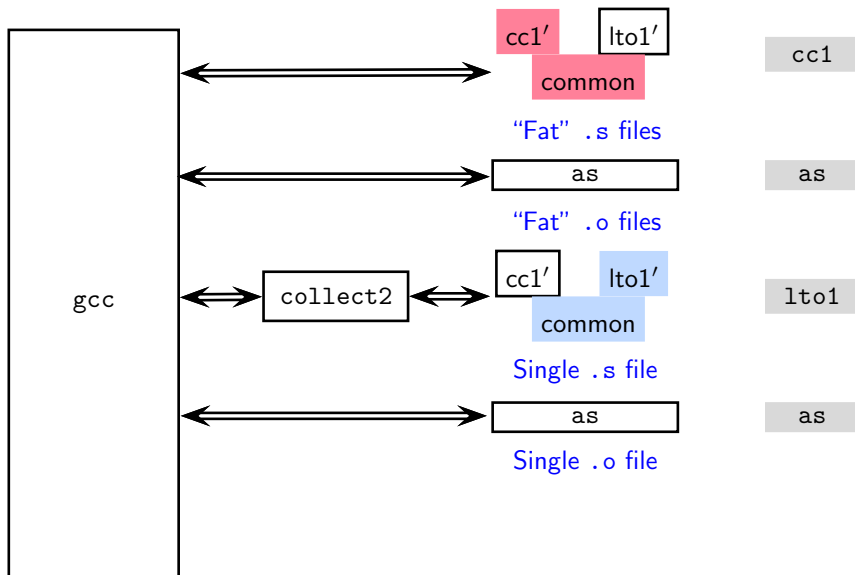


The GNU Tool Chain for LTO Support

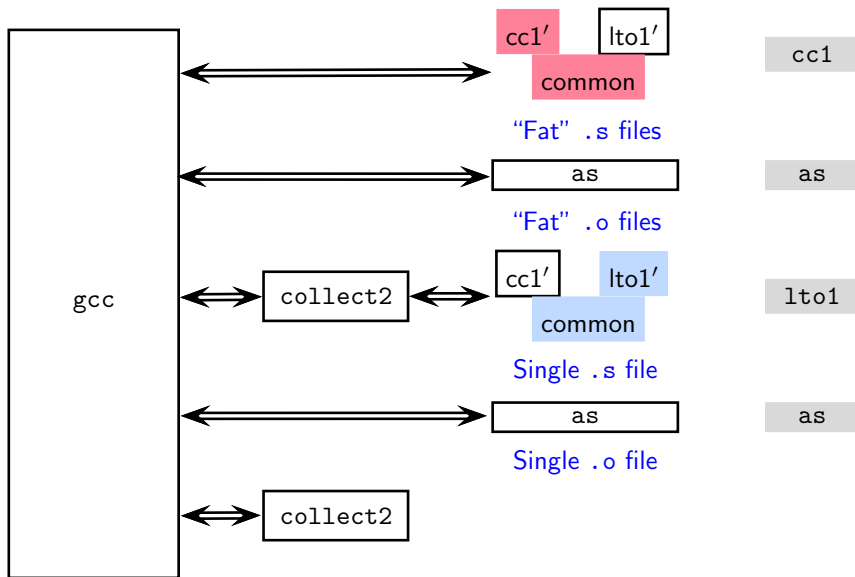

The GNU Tool Chain for LTO Support

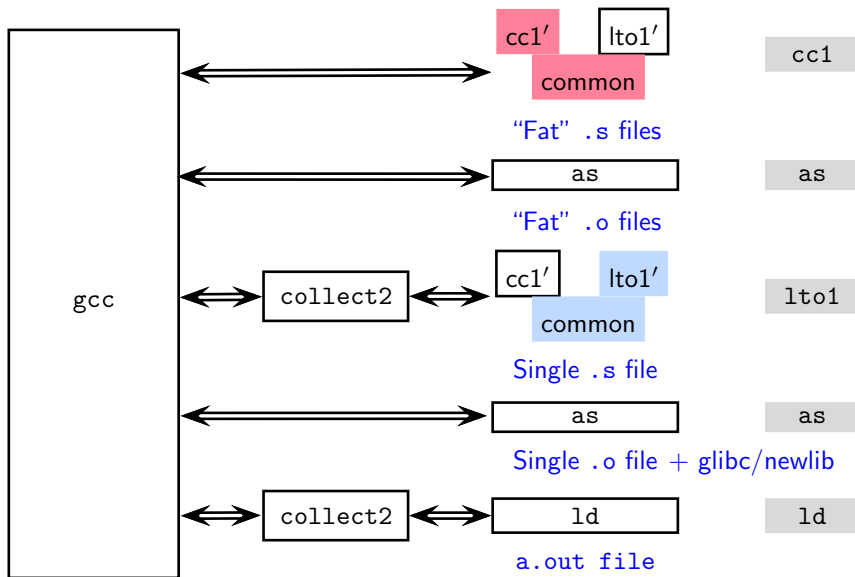

The GNU Tool Chain for LTO Support

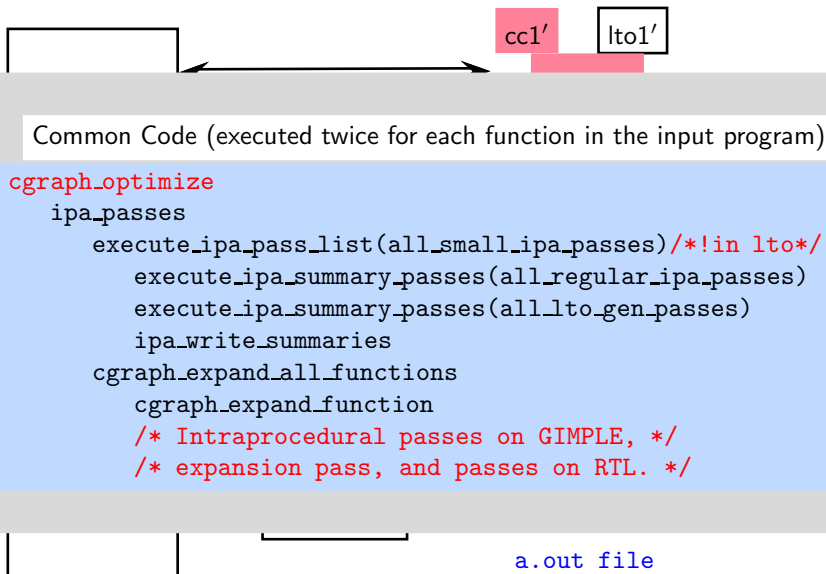

WHOPR Mode of Link Time Optimization (1)

- “Fat” files could be real fat
- For large programs with thousands of functions, the entire program may not fit in the memory
- It would be useful to read only
 - ▶ the call graph and not function bodies
 - ▶ summary information for each function
- This would enable independent processing of functions at the interprocedural level
Parallel analysis on multiple CPUs analysis would be an added advantage



WHOPR Mode of Link Time Optimization (2)

Three steps

- LGEN: Local Generation of summary information **Potentially Parallel**
- WPA: Whole Program Analysis **Sequential**
 - ▶ Reads the call graph and not function bodies
 - ▶ summary information for each function
- LTRANS: Local Transformations **Potentially Parallel**



Part 6

Conclusions

Conclusions

- Excellent mechanism of plugging in different
 - ▶ translators in the main driver
 - ▶ front ends, passes, and back ends in the main compiler
- However, the plugins have been used in an adhoc manner
- LTO provides a good support for real interprocedural analysis and optimization

