

CS230: Digital Logic Design and Computer Architecture

Lecture 9: Addressing Modes and ISA/Microarch.

<https://www.cse.iitb.ac.in/~biswa/courses/CS230/main.html>



Phones on Silence

If you are busy,

Then you may not consider
making others busy 😊

Recap

Name	Format	Example						Comments
add	R	0	18	19	17	0	32	add \$s1,\$s2,\$s3
sub	R	0	18	19	17	0	34	sub \$s1,\$s2,\$s3
addi	I	8	18	17	100			addi \$s1,\$s2,100
lw	I	35	18	17	100			lw \$s1,100(\$s2)
sw	I	43	18	17	100			sw \$s1,100(\$s2)

S1, s2, and s3 are R17, R18, and R19, respectively.

For lw/sw, the address of interest is address stored in s2 + 100

Addressing Modes

(How and where to find the data)



Stock Market Report

300.48	341.94	394.71	361.91	346.53
346.28	311.91	329.03	366.36	
353.73	336.70	358.16	384.78	351.14
314.18	301.21	310.81	311.54	423.51
339.44	364.89	399.59	316.14	365.44
395.43	351.23	359.43	395.43	383.17
381.01	263.43	310.23	322.52	363.17
350.11	304.01	334.01	446.15	458.41
358.41	358.25	358.25	358.25	358.25
322.71	335.36	334.01	446.15	458.41
318.52	335.78	338.84	363.07	322.71
340.41	321.73	355.73	352.28	364.41
417.58	326.12	355.73	352.28	364.41
328.25	364.41	365.51	365.51	328.25
		328.25	328.25	328.25

Five Common Addressing Modes


Immediate



addi \$t0, \$t1, 5


Five Common Addressing Modes

Register

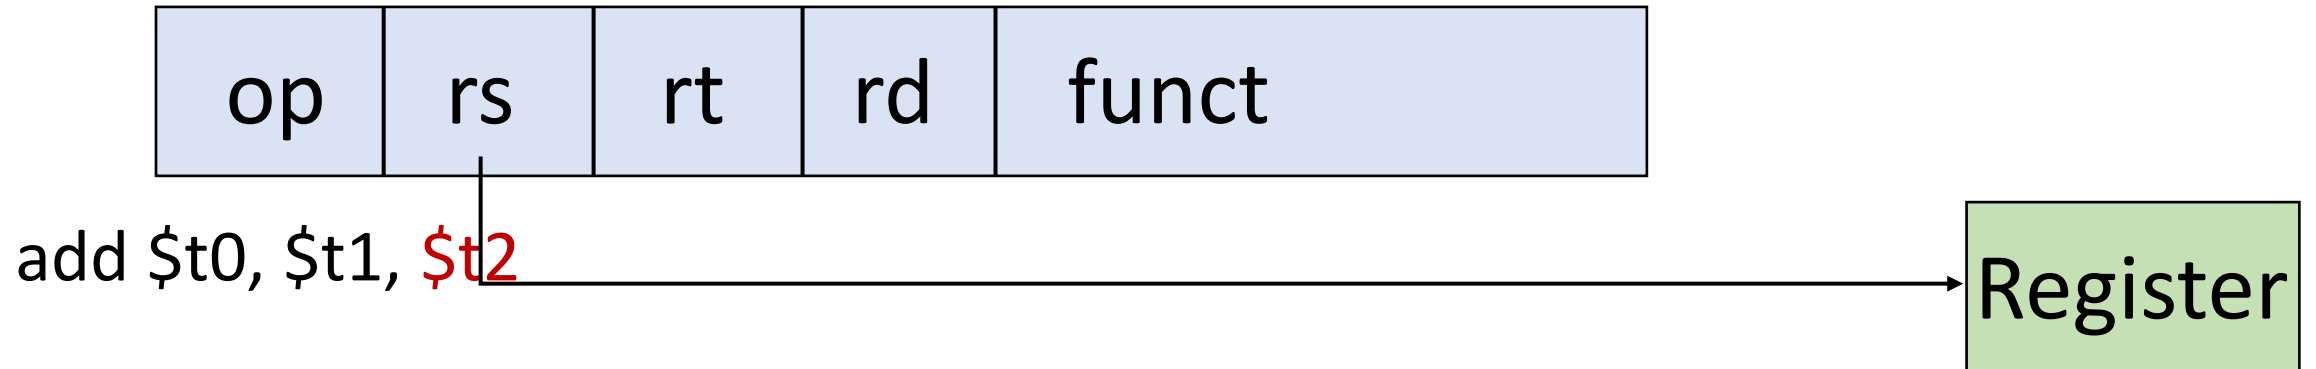


Five Common Addressing Modes

Base (Arrays, structures, pointers)

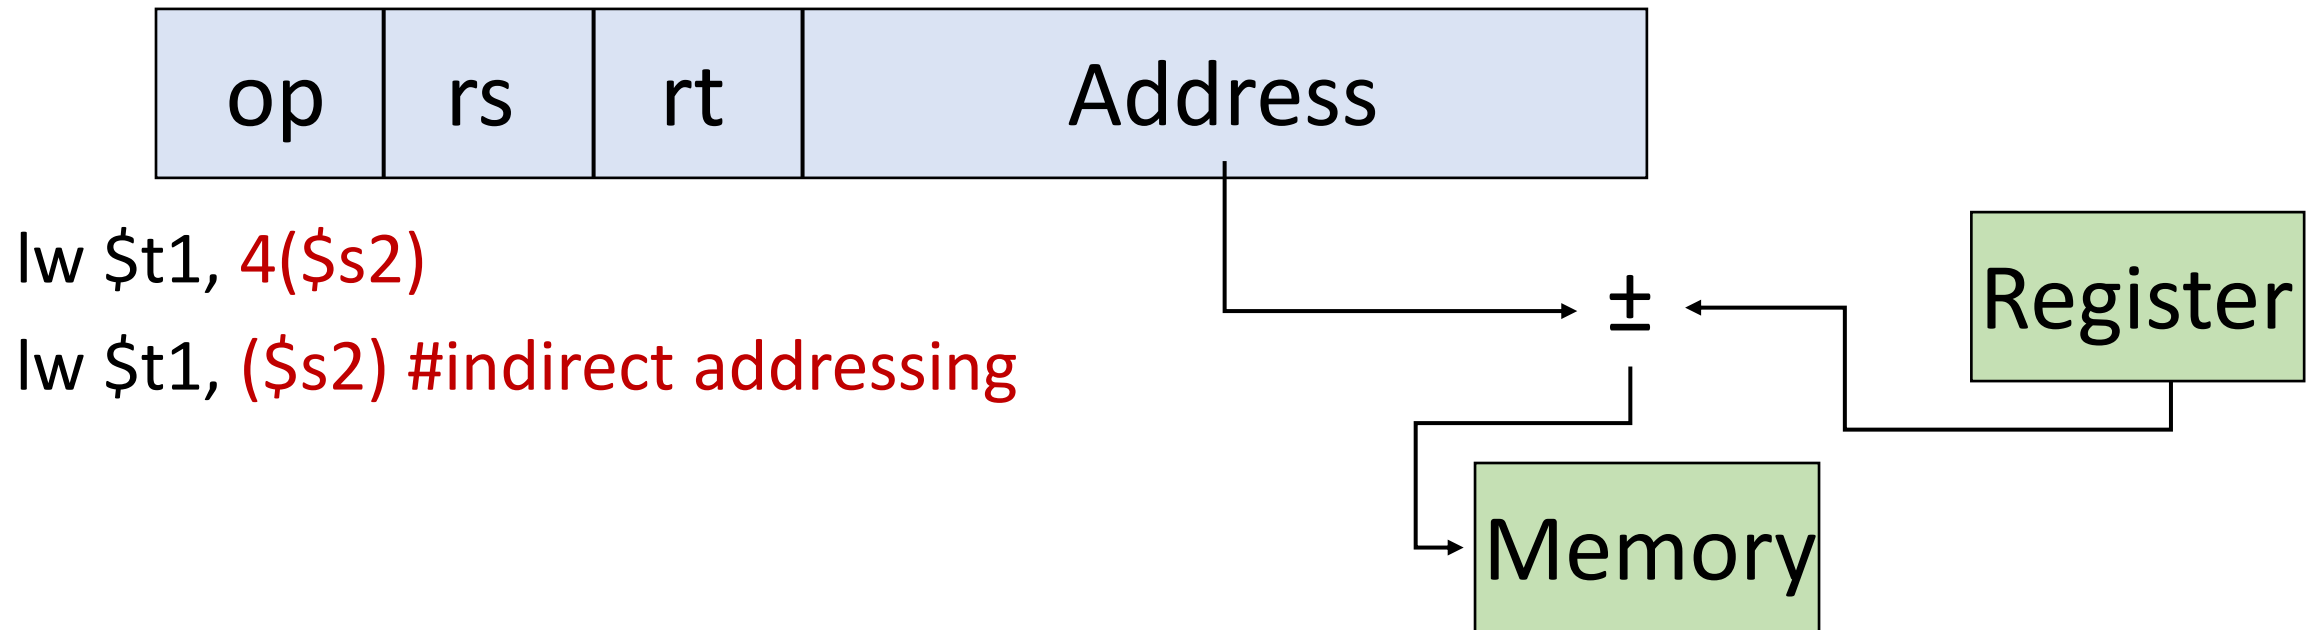


Five Common Addressing Modes

PC-relative (e.g., conditional branches, need an offset)

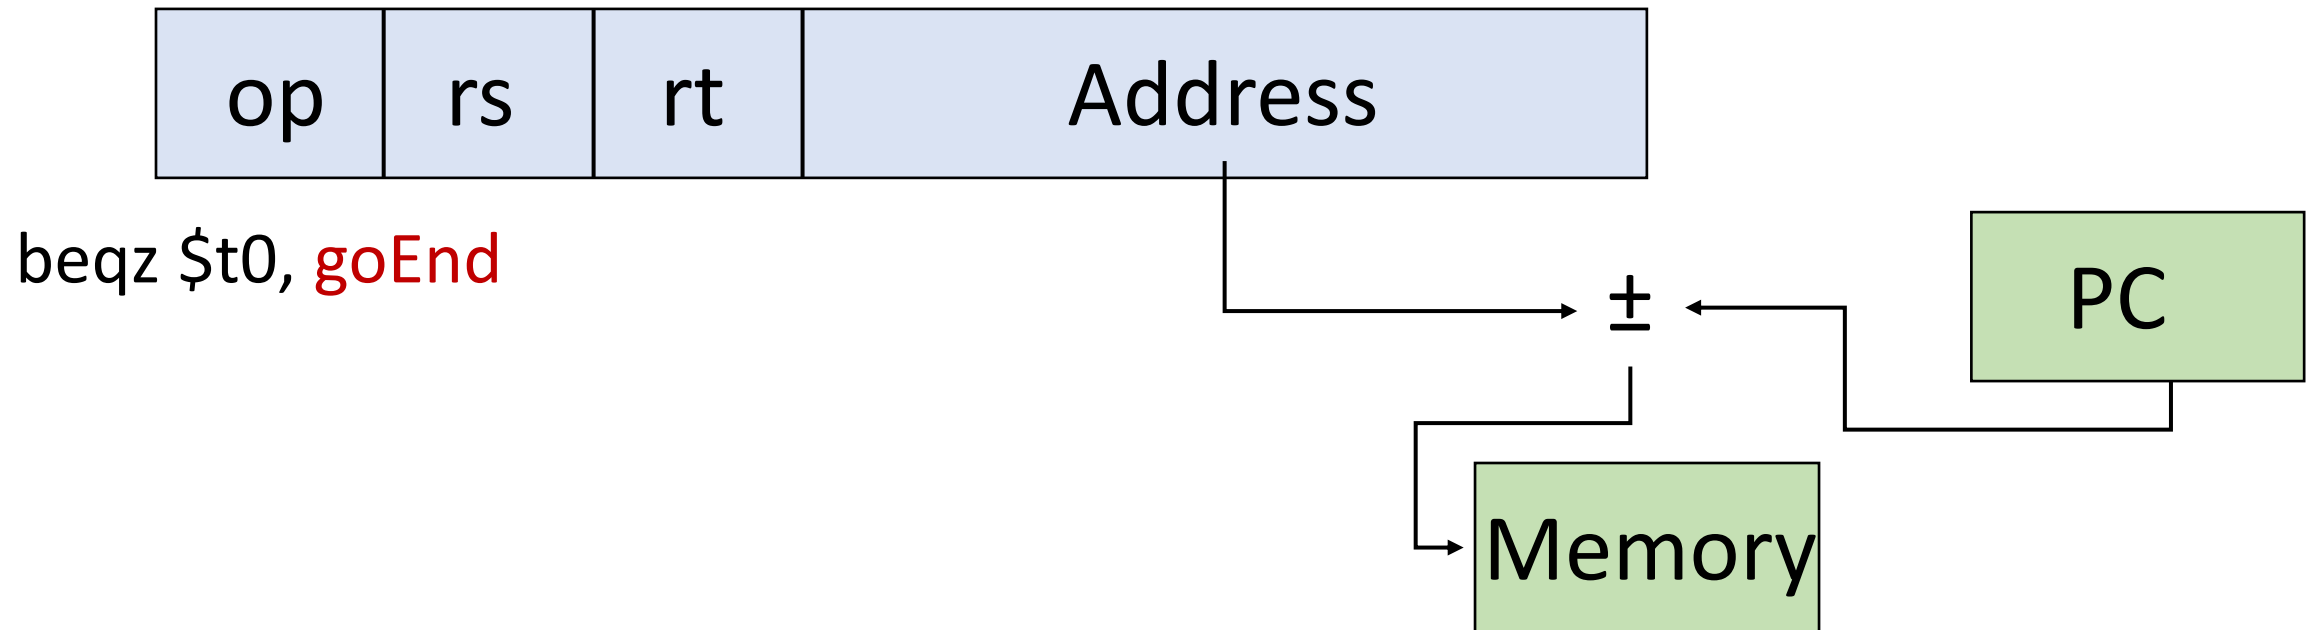


Five Common Addressing Modes


Pseudodirect

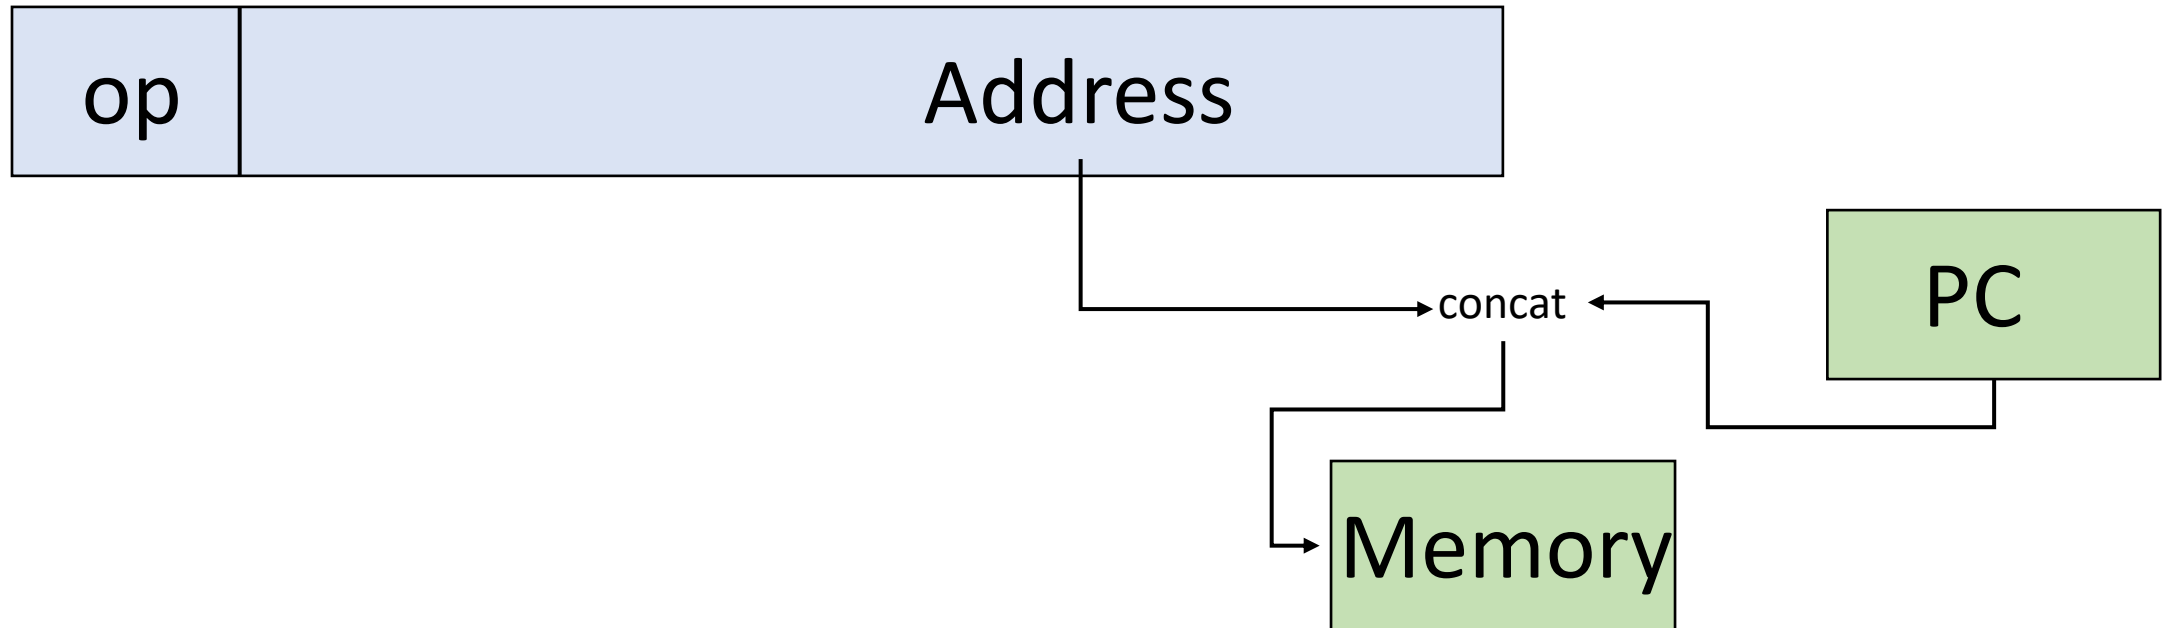


jal



Example

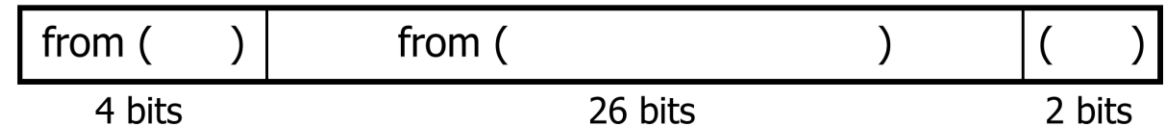

from the low order 26 bits of the jump instruction

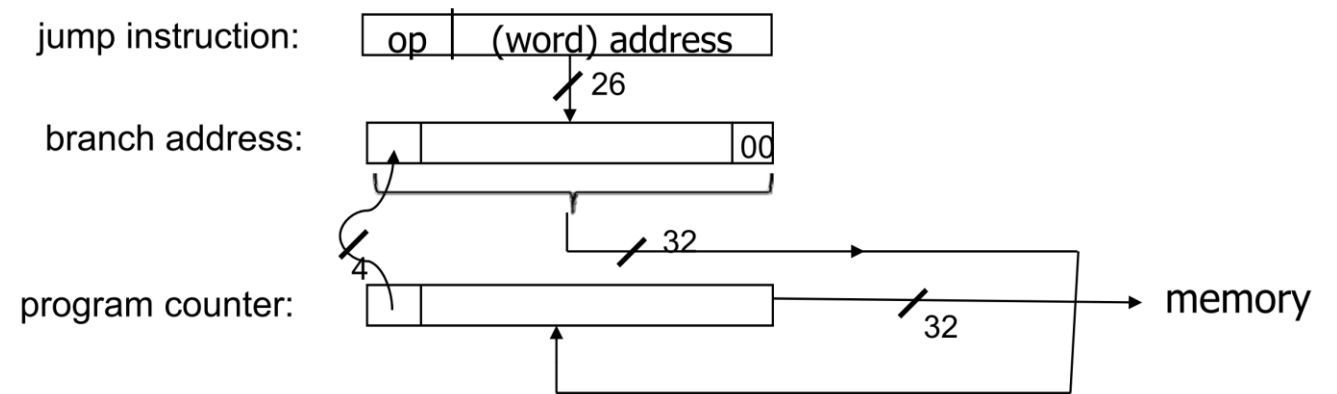

Revisiting ISA and Microarchitecture

Microarchitecture (Not exposed to us)

- Implementation of an ISA
- Programmer cannot see/access it

ISA:

add instruction

Microarch:

Implementation of an adder (ripple carry)

ISA: What does it provide?

Opcodes,

Addressing Modes,

Instruction Types and Formats,

Registers

Access control: user/OS

Address space,

Addressability,

Alignment

ISA: What does it provide?

Instructions:

Opcodes,

Addressing Modes,

Instruction Types and Formats,

Registers

Access control: user/OS

ISA must satisfy the needs of the software: - assembler, compiler, OS,

Memory: Address space,

Addressability,

Alignment

Microarchitecture

Rest of C230 after ISA 😊

Caches

Memory Controllers

Branch Predictors, Prefetchers, ...

Microarchitecture

Processor is in state S

Processor moves to state SS

Instruction



State

The information held in the processor at the end of an instruction to provide the processing context for the next instruction.

Computer Architecture

ISA + Microarchitecture

Based on lectures so far

#registers

#cycles to access a register

#Width of the register (32/64 bit)

#Instruction that uses register to access memory

#cycles to access memory

Based on lectures so far

#registers: ISA

#cycles to access a register: Microarch.

#Width of the register (32/64 bit) : ISA

#Instruction that uses register to access memory: ISA

#cycles to access memory: Microarch.

x86: It has 128/256-bit registers and one-bit too 😊

Where to place it?

- Closer to high-level language → Small semantic gap, complex instructions
(CISC kinda? e.g. quicksort an instruction 😊)
- Closer to hardware? → Large semantic gap, simple instructions (RISC kinda?)
- Remember: Compiler+ISA defines app's instruction count

And then the Debate of RISC vs CISC

RISC: Reduced Instruction Set of Computers

Very few simple instructions


Example: MIPS

CISC: Complex Instruction Set of Computers

Lots of complicated instructions

Example: x86 kind of 😊 [x86 is CISC with RISC mysteries]


Mystery

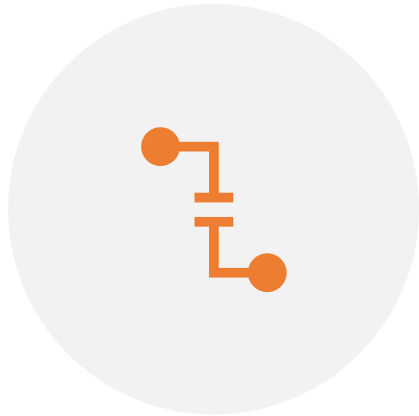

INTEL *CONVERTS* CISC ONES INTO RISC ONES, AND GENERATE MICROOPERATIONS.



INTELLIGENT CISC-RISC DECODER

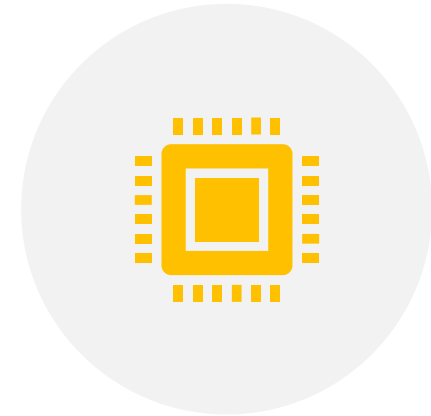

CONSUMES AROUND 2% OF THE CHIP AREA. GOOD OR BAD?

How Easy?

A billion-dollar idea 😊

- i) requires changes to microarchitecture.
- ii) requires changes to ISA.
- iii) both (i) and (ii)

Think about the trade-offs 😊

Does it affect the system stack?

The Other ISAs

World of ISAs



**x86: Intel, AMD: Laptops, Desktops,
Servers**



**ARM: Arm, Qualcomm, Apple,
Samsung: Mobiles**



btw ARM: Advanced RISC Machines 😊

RISC-V: Open-source ISA, what does it mean?

RISC-V, opensource

– What is the license model?

The RISC-V ISA is free and open with a permissive license for use by anyone in all types of implementations. Designers are free to develop proprietary or open source implementations for commercial or other exploitations as they see fit. RISC-V International encourages all implementations that are compliant to the specifications.

Note that the use of the RISC-V trademark requires a license which is granted to members of RISC-V International for use with compliant implementations. The RISC-V specification is based around a structure which allows flexibility with modular extensions and additional custom instructions/extensions. If an implementation was based on the RISC-V specification but includes modifications beyond this framework, then it cannot be referenced as RISC-V.

– Does that mean free for industry to use and play with, but then we pay if we produce a product using this ISA?

The RISC-V ISA is free for product use too. Those who want to use the RISC-V logo should join RISC-V International (see question No. 1).

– If our company builds a RISC-V implementation, is it required to release its source code for the RISC-V core?


No, the source code can be completely closed.

x86

Registers:

80386

For 64-bits, rax, rbx

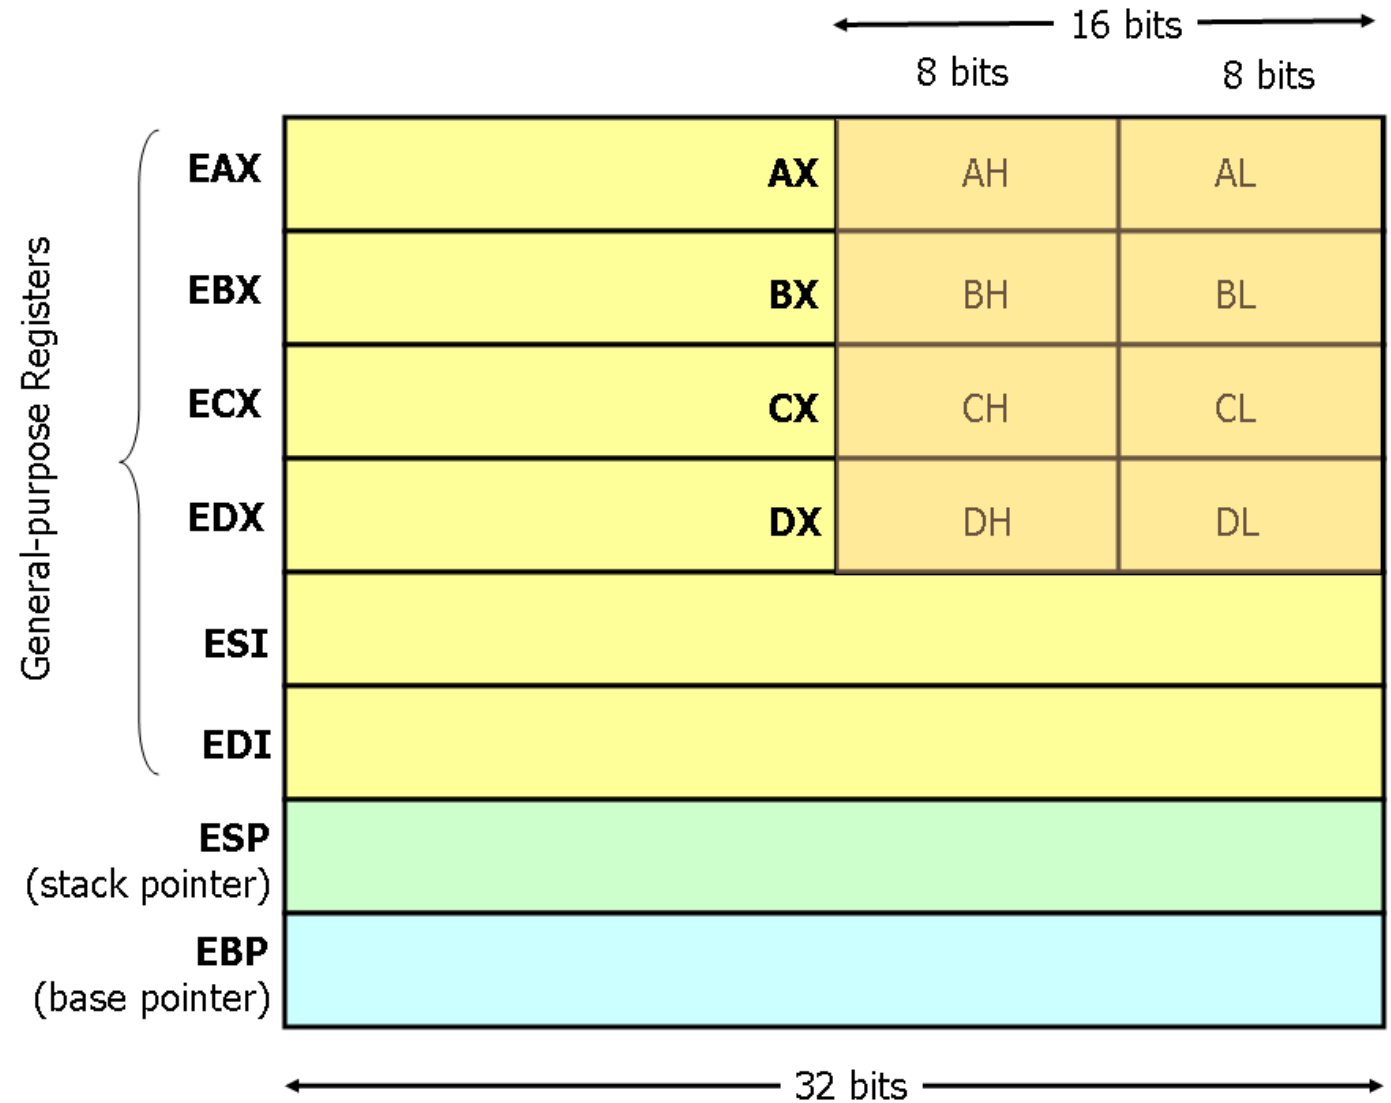

Subtle Differences

- x86 arithmetic/logic instructions: one operand should act as both source and destination

`add $s0, $s1` // Add \$s0 and \$s1 and put it in \$s0 😊

- One of the operands can be in memory:

`wow (programmer) or oh no (instruction size 😞) !!`

`add $s0, Mem[$s1]` 😊

- No more fixed-length instructions 😞 can be 4/8/X bytes

Why?

Fixed Width or Variable Width

Variable: No fixed size

6 bytes for add, 2 bytes for load

Smaller code footprint (compact)

Fixed:

4 bytes for all, Larger code footprint, **simple decoding**

Fallacies

CISC instructions
provide higher
performance

Assembly language
codes provide higher
performance



Coffee Credits

Dhananjay: +1

Yashwant: +2



మంచి రోజు

